OLICOM, INC. OC-2183

Card Type NIC Type

Maximum Onboard Memory

Boot ROM

Network Transfer Rate

Topology Wiring Type Ethernet 4Kb Available 10/100Mbps


Network Interface Card

Linear Bus, Star

Unshielded twisted pair AUI transceiver via DB-15 port RG-58A/U 50ohm coaxial

32-bit PCI

Data Bus

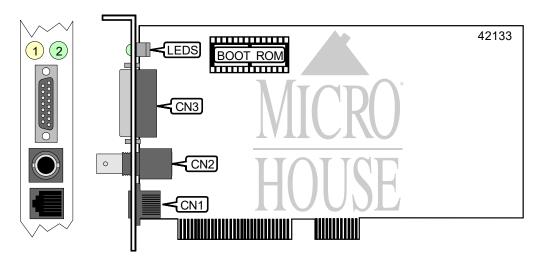

CONNECTIONS				
Function	Label	Function	Label	
UTP via RJ-45 connector	CN1	AUI connector	CN3	
BNC connector	CN2			

DIAGNOSTIC LED(S)			
LED	Color	Status	Condition
LED1	Yellow	On	Data is being received
LED1	Yellow	Off	Data is not being received
LED2	Lt Green	On	Data is being transmitted/received at 100Mbps
LED2	Lt Green	Off	Data is being transmitted/received at 10Mbps