


# CABLETRON SYSTEMS, INC.

## F7069, F7079

Card Type	Network Interface Card
NIC Type	FDDI
Maximum Onboard Memory	Unidentified
Boot ROM	Unidentified
Network Transfer Rate	100Mbps
Topology	Linear Bus, Star
Wiring Type	Fiber optic cable
Data Bus	EISA

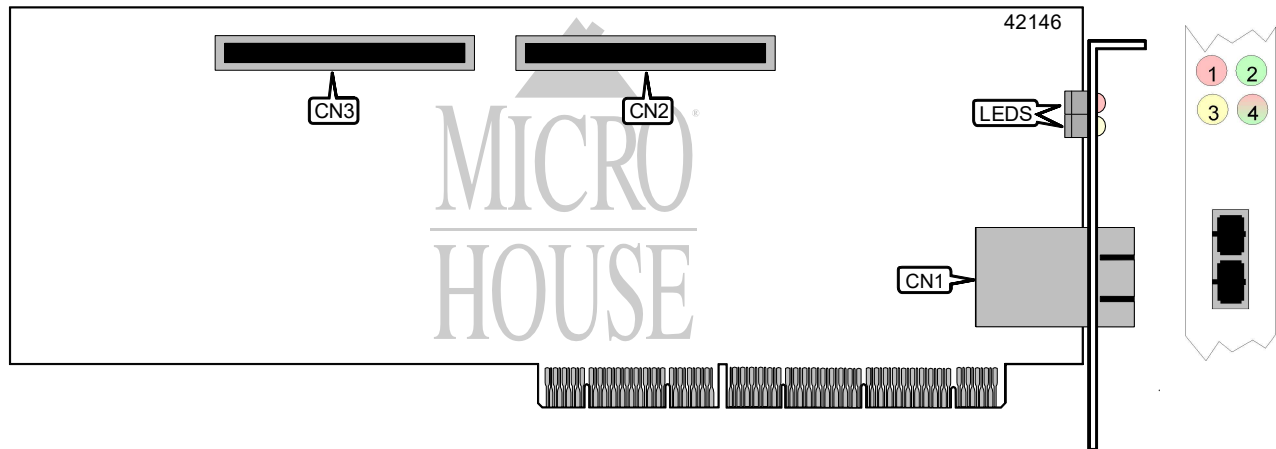

CONNECTIONS			
Function	Label	Function	Label
Fiber optic (Type A, B, M, or S)	CN1	Daughter board cable connector	CN3
Daughter board cable connector	CN2		

Note: CN1 has a "cable insertion key" which is configurable for the various types of FO connectors.

DIAGNOSTIC LED(S)			
LED	Color	Status	Condition
LED1	Red	Blinking	Processor is functioning normally
LED1	Red	Off	Processor is not functioning normally
LED2	Green	On	Data is being transmitted
LED2	Green	Off	Data is not being transmitted
LED3	Yellow	On	Data is being received
LED3	Yellow	Off	Data is not being received
LED4	Red	On	Network connection is broken
LED4	Green	On	Network connection is good
LED4	Red/Green	Off	Collision detected on network