


CISCO SYSTEMS, INC.

WA - C 4 3 2

| | |
|------------------------|-------------------------|
| Card Type | Network Interface Card |
| NIC Type | Ethernet |
| Maximum Onboard Memory | Unidentified |
| Boot ROM | Unidentified |
| Network Transfer Rate | 10Mbps |
| Topology | Star |
| Wiring Type | Unshielded twisted pair |
| Data Bus | 32-bit PCI |

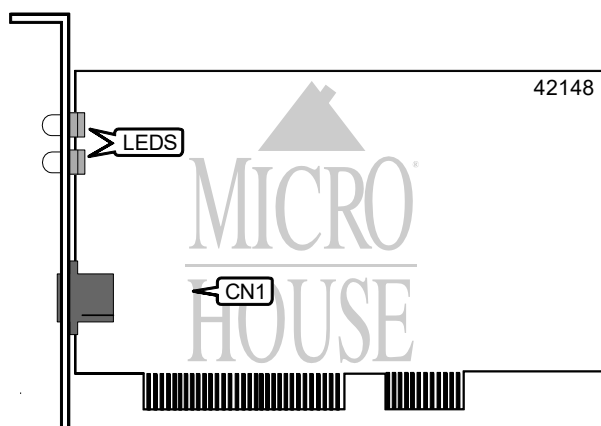

| CONNECTIONS | |
|-------------------------|-------|
| Function | Label |
| UTP via RJ-45 connector | CN1 |

| DIAGNOSTIC LED(S) | | |
|---|------------|--|
| Green LED | Yellow LED | Condition |
| On | Off | Fiber Optic link is good |
| Off | On | Fiber Optic link is broken |
| On | On | Data is not being transmitted/received |
| Off | Off | Network connection is broken |
| Note: Exact location of LEDs is unidentified, refer to above for function of corresponding color. | | |