


CISCO SYSTEMS, INC.

CDDI/FDDI EISA (DUAL ATTACHMENT OPTION)

Card Type	Network Interface Card
NIC Type	CDDI/FDDI
Maximum Onboard Memory	Unidentified
Boot ROM	Unidentified
Network Transfer Rate	10Mbps
Topology	Star
Wiring Type	Unshielded twisted pair
Data Bus	32-bit EISA

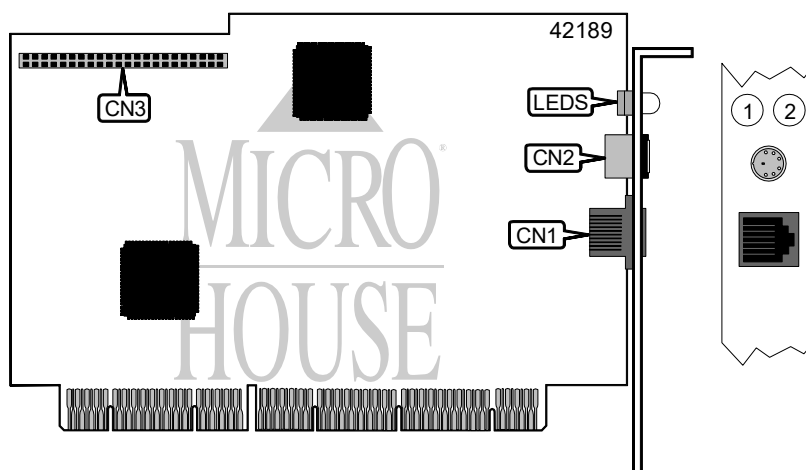

CONNECTIONS			
Function	Label	Function	Label
UTP via RJ-45 connector	CN1	44-pin EISA interface	CN3
6-pin mini DIN connector	CN2		

DIAGNOSTIC LED(S)			
LED	Color	Status	Condition
LED1	Unidentified	On	Diagnostic check successful
LED1	Unidentified	Off	Diagnostic check failed
LED2	Unidentified	On	Network connection is good
LED2	Unidentified	Off	Network connection is broken