


EMULEX CORPORATION

LIGHTPULSE PCI HOST

| | |
|------------------------|--|
| Card Type | Network Interface Card |
| NIC Type | FDDI |
| Maximum Onboard Memory | Unidentified |
| Boot ROM | Unidentified |
| Network Transfer Rate | Unidentified |
| Topology | Star |
| Wiring Type | Fiber optic cable, unshielded Twisted Pair |
| Data Bus | 32-bit PCI |

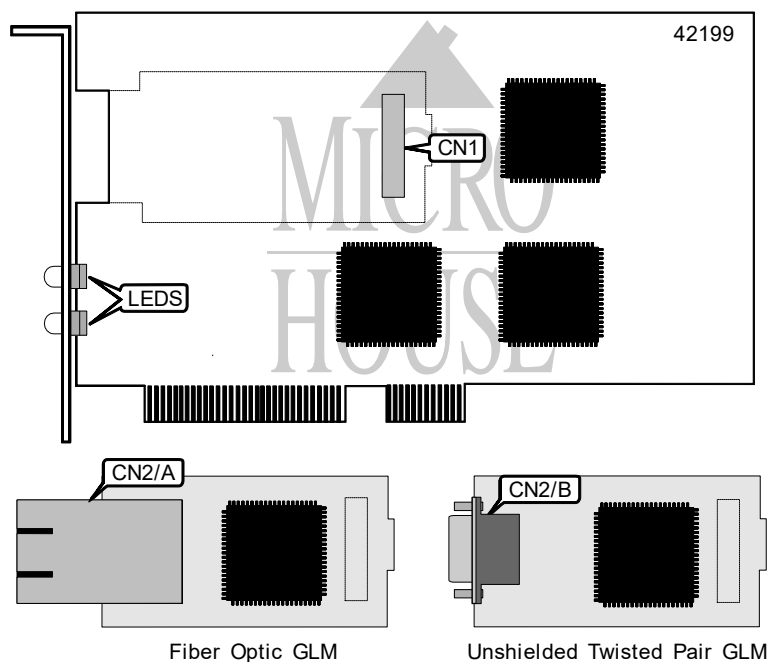

| CONNECTIONS | | |
|--|--|-------|
| Function | | Label |
| 80-pin proprietary "GLM" interface connector | | CN1 |
| Fiber optic connector via 80-pin proprietary "GLM" interface | | CN2/A |
| UTP on DB9 connector via 80-pin proprietary "GLM" interface | | CN2/B |

| DIAGNOSTIC LED(S) | | |
|-------------------|----------------------|--|
| Green LED | Yellow LED | Condition |
| Off | Off | Wake-up failure (dead board) |
| Off | On | Power On Self Test failure (dead board) |
| Off | Slow blink (1 Hz) | Wake-up failure |
| Off | Fast blink (4 Hz) | Failure in Power On Self Test |
| Off | Flashing (irregular) | Power On Self Test processing in progress |
| On | Off | Failure while functioning |
| On | On | Failure while functioning |
| On | Slow blink (1 Hz) | Normal – inactive |
| On | Flashing (irregular) | Normal – active |
| On | Fast blink (4 Hz) | Normal – busy |
| Slow blink | Off | Normal – link down or not yet started |
| Slow blink | Slow blink (1 Hz) | Off-line for download |
| Slow blink | Fast blink (4 Hz) | Restricted off-line mode (waiting for restart) |

| MISCELLANEOUS TECHNICAL NOTES |
|---|
| If either media or speed is changed, the "GLM" must be changed. |

