


CISCO SYSTEMS, INC.
FDDI EISA SCO DUAL ATTACHMENT ADAPTER

Card Type	Network Interface Card
NIC Type	FDDI
Maximum Onboard Memory	Unidentified
Boot ROM	Unidentified
Network Transfer Rate	10Mbps
Topology	Ring, Peer to peer
Wiring Type	Fiber optic cable
Data Bus	32-bit EISA

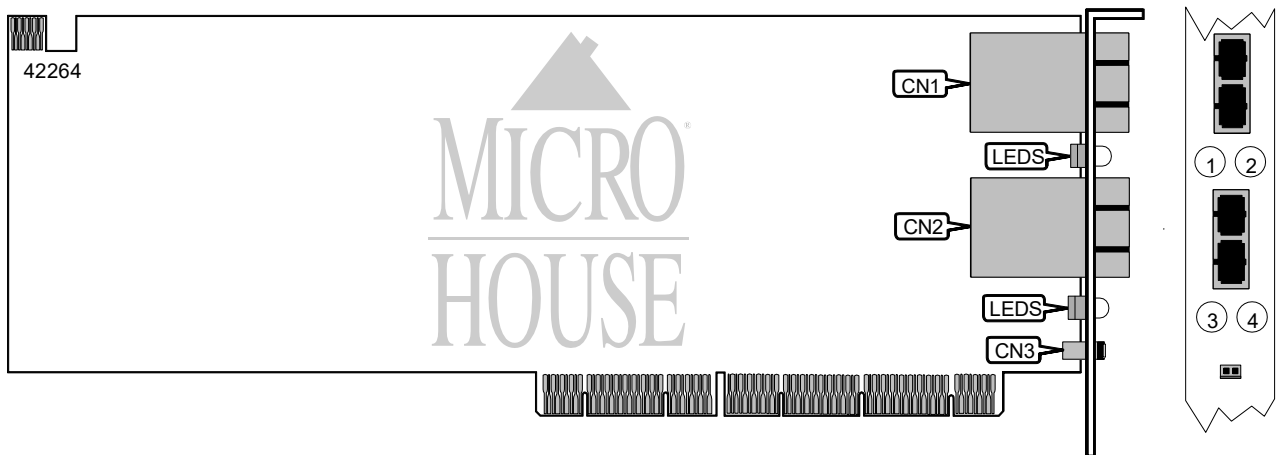

CONNECTIONS			
Function	Label	Function	Label
Fiber optic connector - SC (Port B)	CN1	2-pin mini DIN connector (Bypass Switch)	CN3
Fiber optic connector - SC (Port A)	CN2		

DIAGNOSTIC LED(S)			
LED	Color	Status	Condition
LED1	Unidentified	On	Internal diagnostics tests passed (Port B)
LED1	Unidentified	Off	Internal diagnostics tests failed (Port B)
LED2	Unidentified	On	Network connection is good (Port B)
LED2	Unidentified	Off	Network connection is broken (Port B)
LED3	Unidentified	On	Internal diagnostics tests passed (Port A)
LED3	Unidentified	Off	Internal diagnostics tests failed (Port A)
LED4	Unidentified	On	Network connection is good (Port A)
LED4	Unidentified	Off	Network connection is broken (Port A)