


SIIG, INC. E-LAN 200T

Card Type	Network Interface Card
NIC Type	Ethernet
Maximum Onboard Memory	Unidentified
Boot ROM	Available
Network Transfer Rate	10Mbps
Topology	Star, linear bus
Wiring Type	RJ-45 Unshielded Twisted Pair
	AUI transceiver
Data Bus	16-bit ISA

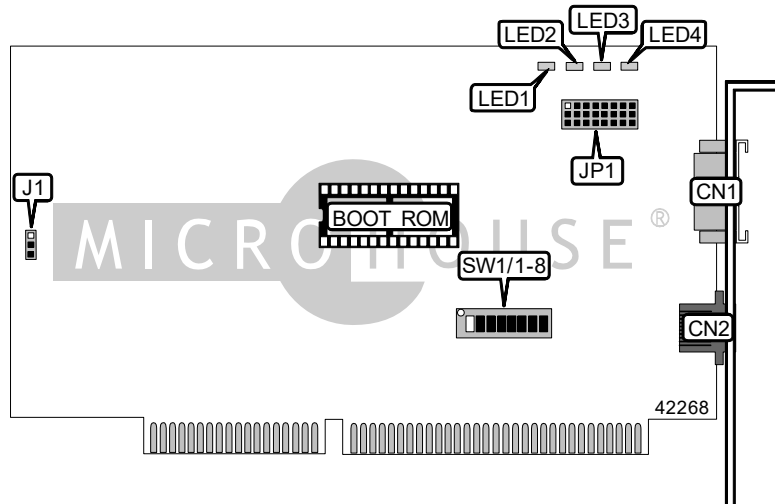

CONNECTIONS			
Function	Label	Function	Label
10 Base-5 AUI connector	CN1	10 Base-T UTP connector	CN2

USER CONFIGURABLE SETTINGS			
Function	Label	Position	
í AT bus timing	J1	Pins 1 & 2 closed	
Not fully AT bus timing	J1	Pins 2 & 3 closed	
í Remote boot disable	SW1/8	Off	
Remote boot enable	SW1/8	On	
í Factory configured - do not alter	JP1	Reserved	

BIOS ADDRESS SELECTION			
Address	SW1/5	SW1/6	SW1/7
C000h	On	On	On
C400h	Off	On	On
í C800h	On	Off	On
CC00h	Off	Off	On
D000h	On	On	Off
D400h	Off	On	Off
D800h	On	Off	Off
DC00h	Off	Off	Off

Continued on next page. . .

SIIG E-LAN 200T

. . . continued from previous page

BASE I/O ADDRESS SELECTION		
Setting	SW1/3	SW1/4
í 300h	On	On
320h	Off	On
340h	On	Off
360h	Off	Off

INTERRUPT SELECTION		
IRQ	SW1/1	SW1/2
2	On	On
í 3	Off	On
4	On	Off
5	Off	Off

DIAGNOSTIC LED(S)
Note: Functions of LED1, LED2, LED3, LED4 are unidentified.