


IBM CORPORATION
PCI TOKEN RING ADAPTER
PCI WAKE ON LAN TOKEN-RING ADAPTER,

Card Type	Network Interface card
NIC Type	Token Ring
Boot ROM	Unavailable
Network Transfer Rate	16/4Mbps
Topology	Star
Wire Type	Unshielded twisted pair
	Shielded twisted pair
Data Bus	32-bit PCI

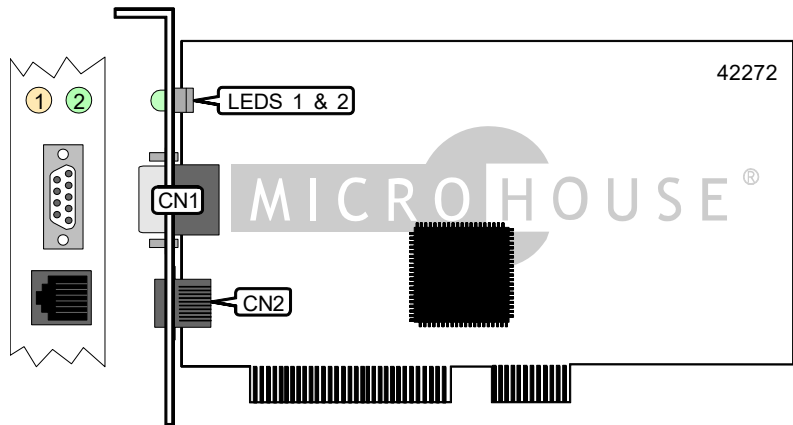

CONNECTIONS			
Function	Label	Function	Label
9-pin serial port	CN1	RJ-45 UTP connector	CN2

DIAGNOSTIC LED(S)		
LED 1 (Amber)	LED 2 (Green)	Condition
Blinking	Blinking	Adapter is active and awaits initialization
Off	Off	Power is off or initialization is in progress
Off	Blinking	Self diagnosis detected no problems, waiting to open
Off	On	The adapter is open and operational
On	Off	Self diagnosis failed. A problem exists
Blinking	Off	Adapter is closed. A problem exists
Blinking	On	Adapter has detected beaconing or a hard error
On	On	Adapter has failed before self-diagnostic test.