


# EDIMAX

## 2000A/V2.3

Card Type	Network Interface Card
NIC Type	Ethernet
Maximum Onboard Memory	Unidentified
Boot ROM	Available
Network Transfer Rate	10Mbps
Topology	Linear Bus, Star
Wiring Type	Unshielded twisted pair (RJ-45), AUI, RG-58A/U 50ohm coaxial
Data Bus	16-bit ISA

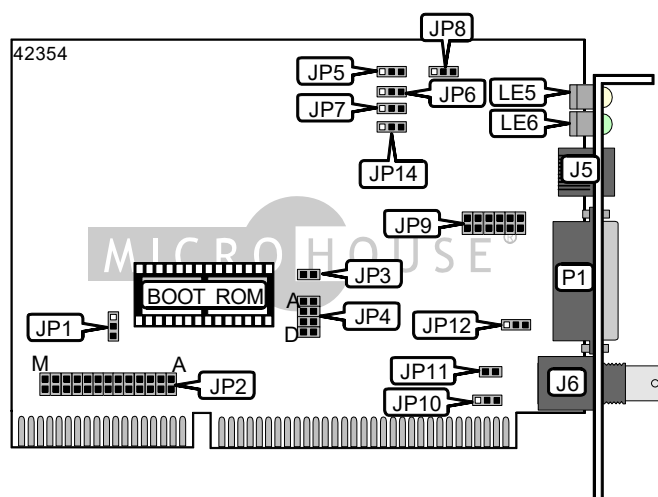

CONNECTIONS			
Function	Label	Function	Label
UTP connector (RJ-45)	J5	External LED connector	JP11
BNC connector	J6	AUI connector	P1

USER CONFIGURABLE SETTINGS			
Function	Label	Position	
Main board compatibility jumper disabled	JP1	Pins 1 & 2 closed	
Main board compatibility jumper option enabled	JP1	Pins 2 & 3 closed	
Boot ROM enabled	JP3	Closed	
Boot ROM disabled	JP3	Open	
SQE function enabled	JP5	Pins 1 & 2 closed	
SQE function disabled	JP5	Pins 2 & 3 closed	
Cable length normal	JP7	Pins 1 & 2 closed	
Cable length long	JP7	Pins 2 & 3 closed	
Link test disabled	JP8	Pins 1 & 2 closed	
Link test enabled	JP8	Pins 2 & 3 closed	
Autopolarity function enabled	JP14	Pins 1 & 2 closed	
Autopolarity function disabled	JP14	Pins 2 & 3 closed	

BASE I/O ADDRESS SELECTION		
Setting	JP2/A	JP2/B
300h	Closed	Closed
320h	Closed	Open
340h	Open	Closed
360h	Open	Open

continued on next page. . .

# EDIMAX

## 2000A/V2.3

... continued from previous page

INTERRUPT SELECTION						
IRQ	JP2/C	JP2/D	JP2/E	JP2/F	JP2/G	JP2/H
3	Closed	Open	Open	Open	Open	Open
4	Open	Closed	Open	Open	Open	Open
5	Open	Open	Closed	Open	Open	Open
6	Open	Open	Open	Closed	Open	Open
7	Open	Open	Open	Open	Closed	Open
9	Open	Open	Open	Open	Open	Closed
10	Open	Open	Open	Open	Open	Open
11	Open	Open	Open	Open	Open	Open
12	Open	Open	Open	Open	Open	Open
14	Open	Open	Open	Open	Open	Open
15	Open	Open	Open	Open	Open	Open

INTERRUPT SELECTION CONTINUED					
IRQ	JP2/I	JP2/J	JP2/K	JP2/L	JP2/M
3	Open	Open	Open	Open	Open
4	Open	Open	Open	Open	Open
5	Open	Open	Open	Open	Open
6	Open	Open	Open	Open	Open
7	Open	Open	Open	Open	Open
9	Open	Open	Open	Open	Open
10	Closed	Open	Open	Open	Open
11	Open	Closed	Open	Open	Open
12	Open	Open	Closed	Open	Open
14	Open	Open	Open	Closed	Open
15	Open	Open	Open	Open	Closed

CABLE TYPE SELECTION			
Type	JP9/A-E	JP10	JP12
AUI transceiver via DB-15 port	Open	Pins 1 & 2 closed	Pins 2 & 3 closed
RG-58A/U 50ohm coaxial	Open	Pins 2 & 3 closed	Pins 1 & 2 closed
Unshielded twisted pair	Closed	Pins 2 & 3 closed	Pins 2 & 3 closed

ROM ADDRESS SELECTION				
Address	JP4/A	JP4/B	JP4/C	JP4/D
C000h	Closed	Closed	Closed	Closed
C400h	Closed	Closed	Closed	Open
C800h	Closed	Closed	Open	Closed
CC00h	Closed	Closed	Open	Open
D000h	Closed	Open	Closed	Closed
D400h	Closed	Open	Closed	Open
D800h	Closed	Open	Open	Closed
DC00h	Closed	Open	Open	Open

continued on next page. . .

EDIMAX  
2000A/V2.3

. . . continued from previous page

DIAGNOSTIC LED(S)			
LED	Color	Status	Condition
LE5	Yellow	On	Polarity reversed and corrected
LE5	Yellow	Off	Polarity normal
LE6	Green	On	UTP link is good
LE6	Green	Off	UTP link is broken