


EDIMAX 2000A/V3.X

Card Type	Network Interface Card
NIC Type	Ethernet
Maximum Onboard Memory	Unidentified
Boot ROM	Available
Network Transfer Rate	10Mbps
Topology	Linear Bus, Star
Wiring Type	Unshielded twisted pair (RJ-45), AUI transceiver via DB-15 port, RG-58A/U 50ohm coaxial
Data Bus	16-bit ISA

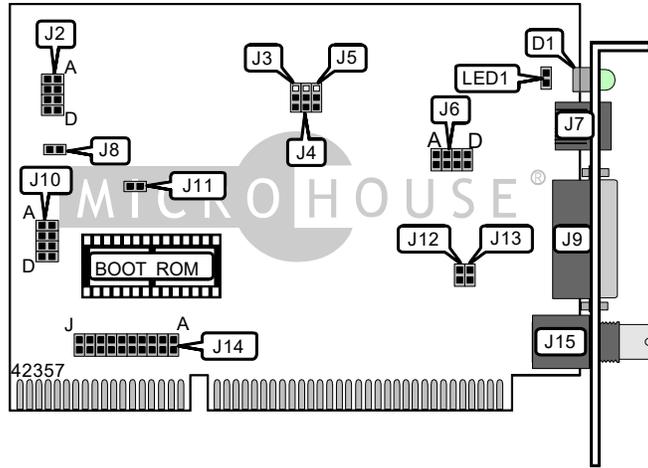

CONNECTIONS				
Function	Label	Function	Label	Label
UTP connector (RJ-45)	J7	BNC connector	J15	
AUI connector	J9	External LED connector	LED1	

USER CONFIGURABLE SETTINGS			
Function	Label	Position	
Boot ROM enabled	J2/D	Closed	
í Boot ROM disabled	J2/D	Open	
SQE enabled	J3	Pins 1 & 2 closed	
SQE disabled	J3	Pins 2 & 3 closed	
UTP cable long	J4	Pins 2 & 3 closed	
UTP cable normal	J4	Pins 1 & 2 closed	
Link enabled	J5	Pins 2 & 3 closed	
Link disabled	J5	Pins 1 & 2 closed	
í Main Board compatibility	J8	Open	
Main Board compatibility option enabled	J8	Closed	
NE2000 compatibility	J11	Open	
NE1000 compatibility	J11	Closed	

Continued on next page. . .

EDIMAX 2000A/V3.X

. . . continued from previous page

BASE I/O ADDRESS SELECTION				
Setting	J10/A	J10/B	J10/C	J10/D
200h	Open	Closed	Closed	Closed
220h	Open	Closed	Closed	Open
240h	Open	Closed	Open	Closed
260h	Open	Closed	Open	Open
280h	Open	Open	Closed	Closed
2A0h	Open	Open	Closed	Open
2C0h	Open	Open	Open	Closed
300h	Closed	Closed	Closed	Closed
320h	Closed	Closed	Closed	Open
340h	Closed	Closed	Open	Closed
360h	Closed	Closed	Open	Open
380h	Closed	Open	Closed	Closed

INTERRUPT SELECTION					
IRQ	J14/A	J14/B	J14/C	J14/D	J14/E
2/9	Closed	Open	Open	Open	Open
3	Open	Closed	Open	Open	Open
4	Open	Open	Closed	Open	Open
5	Open	Open	Open	Closed	Open
7	Open	Open	Open	Open	Closed
10	Open	Open	Open	Open	Open
11	Open	Open	Open	Open	Open
12	Open	Open	Open	Open	Open
14	Open	Open	Open	Open	Open
15	Open	Open	Open	Open	Open

INTERRUPT SELECTION CONTINUED					
IRQ	J14/F	J14/G	J14/H	J14/I	J14/J
2/9	Open	Open	Open	Open	Open
3	Open	Open	Open	Open	Open
4	Open	Open	Open	Open	Open
5	Open	Open	Open	Open	Open
7	Open	Open	Open	Open	Open
10	Closed	Open	Open	Open	Open
11	Open	Closed	Open	Open	Open
12	Open	Open	Closed	Open	Open
14	Open	Open	Open	Closed	Open
15	Open	Open	Open	Open	Closed

CABLE TYPE SELECTION			
Type	J6/A-D	J12	J13
AUI transceiver via DB-15 port	Open	Open	Closed
RG-58A/U 50ohm coaxial	Open	Closed	Open
Unshielded twisted pair	Closed	Open	Open

Continued on next page. . .

EDIMAX 2000A/V3.X

. . . continued from previous page

ROM ADDRESS SELECTION			
Address	J2/A	J2/B	J2/C
C000h	Open	Open	Open
C400h	Open	Open	Closed
i C800h	Open	Closed	Open
CC00h	Open	Closed	Closed
D000h	Closed	Open	Open
D400h	Closed	Open	Closed
D800h	Closed	Closed	Open
DC00h	Closed	Closed	Closed

DIAGNOSTIC LED(S)			
LED	Color	Status	Condition
D1	Yellow	On	Polarity reversed (UTP)
D1	Green	On/Blinking	Polarity normal (UTP) (SQE enabled)
D1	Green	On/Blinking	Data is being received (SQE disabled)
D1	Green	Off	Data is not being received (SQE disabled)