


COMPAQ COMPUTER CORPORATION

NETELLIGENT 100 FDDI EISA DAS UTP

Card Type	Network Interface Card
NIC Type	FDDI
Maximum Onboard Memory	Unidentified
Boot ROM	Not available
Network Transfer Rate	100Mbps
Topology	Ring
Wiring Type	RJ-45 Unshielded twisted pair
Data Bus	32-EISA

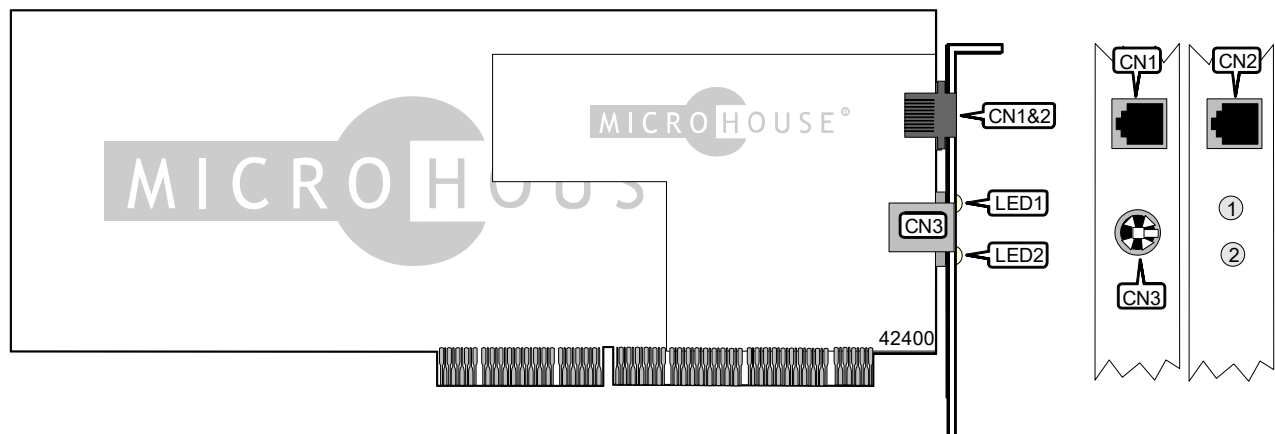

CONNECTIONS			
Function	Location	Function	Location
RJ-45 connector	CN1	Optical bypass	CN3
RJ-45 connector	CN2		

DIAGNOSTIC LED(S)		
LED1 (Green)	LED2 (Yellow)	Condition
Off	Off	Driver not loaded
Off	On	Station management code is running, controller is not connected to the network
On	Off	Controller is ready for use