


COMPAQ COMPUTER CORPORATION

NETELLIGENT 16/4 TR PCI IBM UTP/STP

CONTROLLER

Card Type	Network interface card
NIC Type	Token Ring
Maximum Onboard Memory	Unidentified
Boot ROM	Not available
Network Transfer Rate	4Mbps, 16Mbps
Topology	Ring
Wiring Type	Shielded twisted pair (DB-9), Unshielded twisted pair (RJ-45)
Data Bus	32-bit PCI

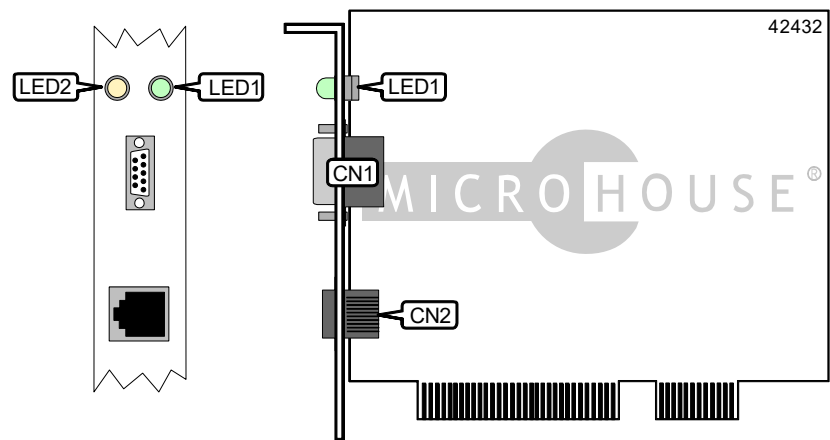

CONNECTIONS			
Function	Label	Function	Label
STP connector (DB-9)	CN1	UTP connector (RJ-45)	CN2

DIAGNOSTIC LED(S)		
LED1 (Green)	LED2 (Amber)	Condition
Blinking	Blinking	Waiting for initialization
Off	Off	Computer is off or initialization is in progress
Off	Blinking	Self-diagnostic tests ok
Off	On	Open and operating correctly
Note: The orientation of the amber and green LEDs may be reversed on some versions.		