


# LANTECH COMPUTER COMPANY

## EN2000 PNP/COMBO

Card Type	Network Interface Card
NIC Type	Ethernet
Boot ROM	Available
Network Transfer Rate	10Mbps (half-duplex), 20Mbps (full-duplex)
Topology	Linear Bus, Star
Wiring Type	Unshielded twisted pair
	AUI transceiver via DB-15 port
	RG-58A/U 50ohm coaxial
Data Bus	16-bit ISA

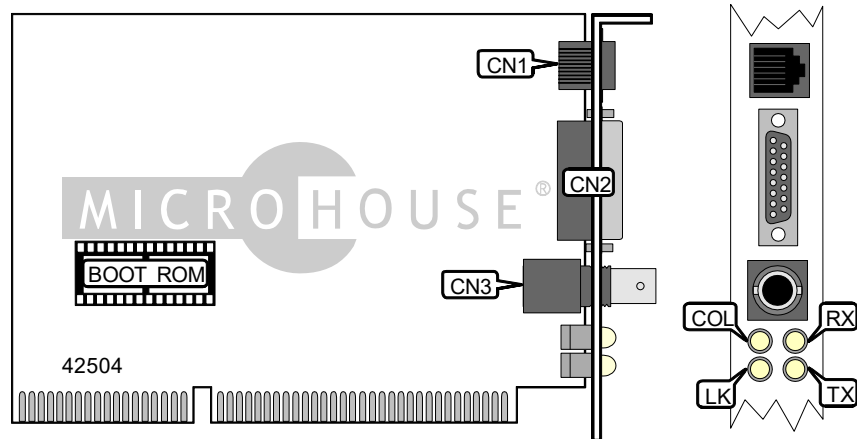

CONNECTIONS			
Function	Label	Function	Label
RJ-45 UTP connector	CN1	RG-58A/U BNC connector	CN3
AUI transceiver via DB-15	CN2		

DIAGNOSTIC LED(S)			
LED	Color	Status	Condition
LK	Unidentified	On	UTP link is good
LK	Unidentified	Off	UTP link is broken
TX	Unidentified	Blinking	Data is being transmitted
TX	Unidentified	Off	Data is not being transmitted
RX	Unidentified	Blinking	Data is being received
RX	Unidentified	Off	Data is not being received
COL	Unidentified	Blinking	Collision detected on network
COL	Unidentified	Off	No collision detected on network