## MOTOROLA, INC.

## MPMC202

Card Type Network Interface Card


NIC Type Ethernet

Network Transfer Rate 100Mbps/10Mbps

**Topology** Star

Wiring Type Unshielded twisted pair via DB-14 port adapter

Data Bus PCI Mezzanine

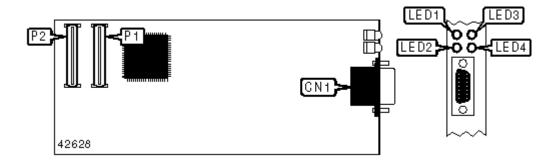

## CONNECTIONS

Function	Label	Function	Label
DB-14 pin connector	CN1	PCI mezzanine card connector	P2
PCI mezzanine card connector	P1		

DIAGNOSTIC LED(S)				
LED	Color	Status	Condition	
LED1	Green	Blinking	Data is being transmitted/received at 100Mbps	
LED1	Green	Off	Data is not being transmitted/received at 100 Mbps	
LED2	Green	On	Network connection at 100Mbps is good	
LED2	Green	Off	100Mbps network connection is broken	
LED3	Yellow	Blinking	Data is being transmitted/received at 10Mbps	
LED3	Yellow	Off	Data is not being transmitted/received at 10Mbps	
LED4	Yellow	On	Network connection at 10Mbps is good	
LED4	Yellow	Off	10Mbps network connection is broken	