


ORCHID TECHNOLOGY PRODESIGNER IIS

| | |
|-------------------------------------|------------|
| Category | Video |
| Video Types Supported | XVGA |
| Video Processor | ET4000 |
| Highest Resolution Supported | 1024 x 768 |
| Data Bus Type | 16-bit ISA |
| Memory Type | DRAM |
| Maximum Onboard Memory | 1024KB |

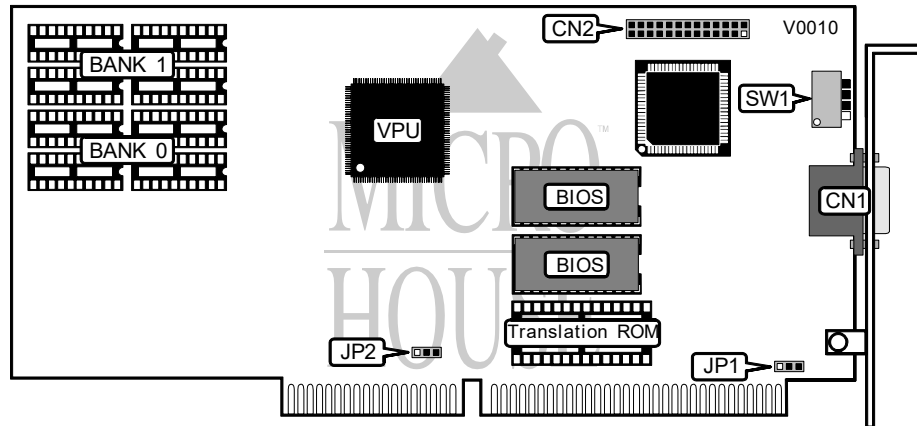

| CONNECTIONS | | | |
|--------------------------|----------|------------------------|----------|
| Purpose : | Location | Purpose : | Location |
| 15-pin analog video port | CN1 | VESA Feature connector | CN2 |

| INTERRUPT SELECTION | |
|---------------------|-------------------|
| IRQ 2/9 | JP1 |
| if Disabled | Pins 2 & 3 closed |
| Enabled | Pins 1 & 2 closed |

| MAINBOARD COMPATIBILITY CONFIGURATION | |
|---------------------------------------|-------------------|
| Problem | JP2 |
| Display is scrambled | Pins 2 & 3 closed |
| System does not boot up | Pins 1 & 2 closed |

| 640 X 480 REFRESH RATE SELECTION | | |
|----------------------------------|------|-------|
| Rate | SW1/ | SW1/2 |
| if 60Hz | Off | Off |
| 60Hz | On | Off |
| 72Hz | Off | On |
| 72Hz | On | On |

Continued on next page . . .

ORCHID TECHNOLOGY PRODESIGNER IIS

... continued from previous page

| 800 X 600 REFRESH RATE SELECTION | | |
|----------------------------------|-------|-------|
| Rate | SW1/1 | SW1/2 |
| 60Hz | Off | Off |
| 56Hz | On | Off |
| 72Hz | Off | On |
| 72Hz | On | On |

| 1024 X 768 REFRESH RATE SELECTION | | |
|-----------------------------------|--------|--------|
| Rate | SW1/1 | SW1/2 |
| 60Hz | Open | Open |
| 45Hz | Open | Closed |
| 60Hz | Closed | Open |
| 70Hz | Closed | Closed |

| TRANSLATION ROM CONFIGURATION | |
|-------------------------------|-------|
| Setting | SW1/3 |
| Translation ROM installed | On |
| Translation ROM not installed | Off |

| SPEED ENHANCEMENT CONFIGURATION | |
|---------------------------------|-------|
| Setting | SW1/4 |
| Speed enhancement enabled | On |
| Standard speed | Off |