


ORCHID TECHNOLOGY FAHRENHEIT VLB

Category	Video
Video Types Supported	XVGA
Video Processor	S3 86C911
Highest Resolution Supported	1280 X 1024
Data Bus Type	32-bit VESA Local Bus
Memory Type	DRAM
Maximum Onboard Memory	2048KB

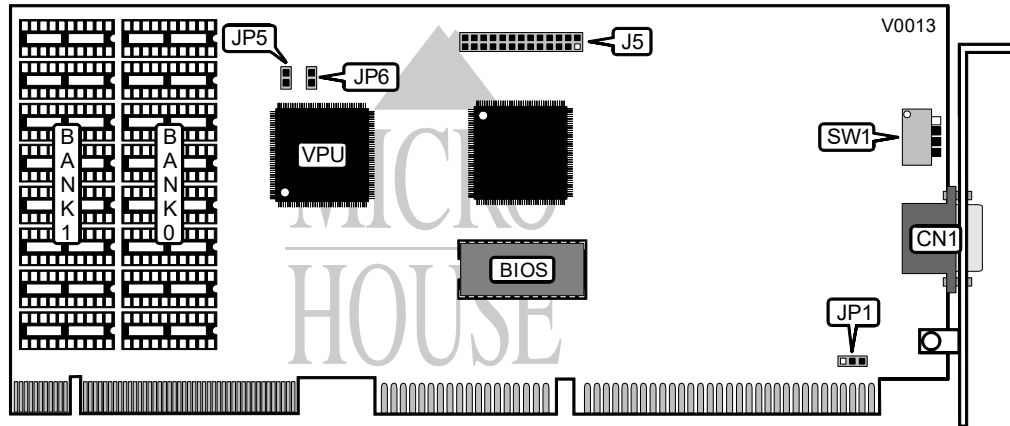

CONNECTIONS			
Purpose	Location	Purpose	Location
15-pin analog video port	CN1	VESA Feature connector	J5

VIDEO INTERRUPT SELECTION	
IRQ 2/9	JP1
Disabled	Pins 2 & 3 closed
Enabled	Pins 1 & 2 closed

640 x 480 REFRESH RATE SELECTION		
Rate	SW1/	SW1/
72Hz	Off	Off
72Hz	On	Off
60Hz	Off	On
60Hz	On	On

800 X 600 REFRESH RATE SELECTION		
Rate	SW1/	SW1/
72Hz	Off	Off
72Hz	On	Off
56Hz	Off	On
60Hz	On	On

Continued on next page . . .

ORCHID TECHNOLOGY

FAHRENHEIT VLB

... continued from previous page

1024 X 768 REFRESH RATE CONFIGURATION			
Rate	Mode	S V1/1	S V1/2
60Hz	Non-Interlaced	Off	Off
70Hz	Non-Interlaced	On	Off
43Hz	Interlaced	Off	On
60HZ	Non-Interlaced	On	On

1280 X 960/1280 x 1024 REFRESH RATE CONFIGURATION			
Rate	Mode	S V1/1	S V1/2
43Hz	Interlaced	Off	Off
48Hz	Interlaced	On	Off

FACTORY CONFIGURED - DO NOT ALTER	
Switch	Position
SW1/3	Off
SW1/4	Off

DRAM CONFIGURATION				
Size	Bank 0	Bank 1	JP5	JP6
1024KB	(8) 44256	NONE	Open	Open
2048KB	(8) 44256	(8) 44256	Closed	Closed