


ATI TECHNOLOGIES, INC.

8514 ULTRA

Category	Video
Video Types Supported	XVGA
Video Processor	MACH8
Highest Resolution Supported	1280 x 1024
Data Bus Type	8-bit/16-bit ISA or MCA
Memory Type	VRAM
Maximum Onboard Memory	1024KB

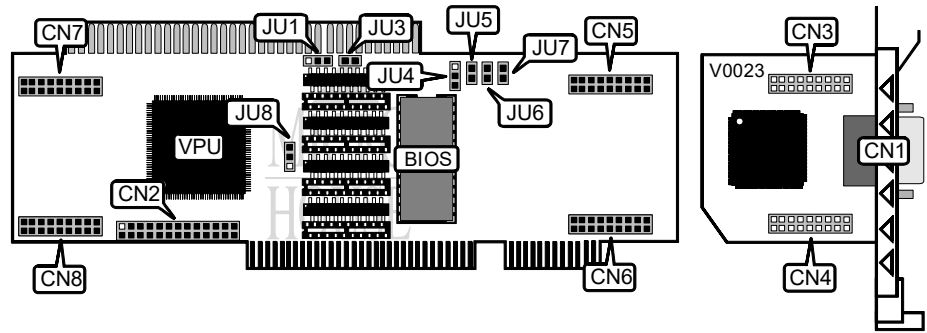

CONNECTIONS			
Purpose :	Location	Purpose :	Location
15-pin analog video port	CN1	Adapter module connector	CN5
VESA Feature connector	CN2	Adapter module connector	CN6
Adapter module connector	CN3	Adapter module connector	CN7
Adapter module connector	CN4	Adapter module connector	CN8

ADAPTER MODULE CONFIGURATION		
Bus type :	CN3	CN4
MCA	Connected to CN6	Connected to CN5
ISA	Connected to CN7	Connected to CN8

I/O BUS SELECTION	
BUS	JU4
16-bit	Pins 1 & 2 closed
8-bit	Pins 2 & 3 closed

Continued on next page . . .

ATI TECHNOLOGIES, INC.
8514 ULTRA

... continued from previous page

PIXEL CLOCK SELECTION	
Setting	JU8
í Clock bar	Pins 2 & 3 closed
Clock	Pins 1 & 2 closed

EEPROM CONFIGURATION	
Setting	JU1
í Enabled	Pins 2 & 3 closed
Disabled	Pins 1 & 2 closed

FACTORY CONFIGURED - DO NOT ALTER	
Jumper	Position
JU5	Open
JU6	Open
JU7	Open

VRAM CONFIGURATION			
ize	B nk 0	B nk 1	U3
512KB	(4) 256K x 4 ZIP	None	Closed
1024KB	(4) 256K x 4 ZIP	(4) 256K x 4 ZIP	Open