


WESTERN DIGITAL CORPORATION
PARADISE ACCELERATOR VL

Category	Video
Video Types Supported	XVGA
Video Processor	WD90C31
Highest Resolution Supported	1280 X 1024
Data Bus Type	32-bit VESA Local Bus
Memory Type	DRAM
Maximum Onboard Memory	1024KB

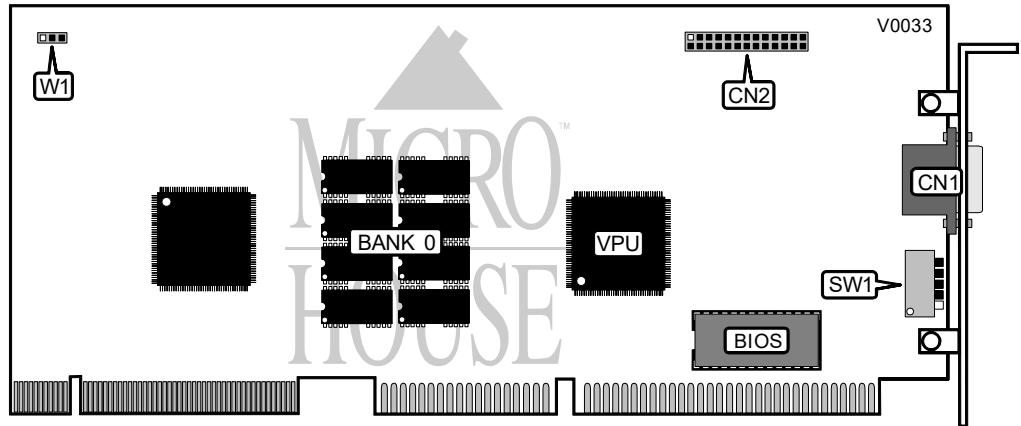

CONNECTIONS			
Purpose	Location	Purpose	Location
15-pin analog video port	CN1	VESA Feature connector	CN2

DELAY CYCLE CONFIGURATION	
Setting	W1
2 clock cycles	Pins 1 & 2 closed
1 clock cycle	Pins 2 & 3 closed

800 X 600 REFRESH RATE SELECTION		
Rate	SW1/	SW1/
56.5Hz	Off	Off
72.1Hz	On	Off
60.5Hz	Off	On
56.5Hz	On	On

Continued on next page . . .

WESTERN DIGITAL CORPORATION
PARADISE ACCELERATOR VL

... continued from previous page

1024 X 768 REFRESH RATE CONFIGURATION			
Rate	Mode	SW1/3	SW1/4
86.7Hz	Interlaced	Off	Off
70.2Hz	Non-Interlaced	On	Off
60.2Hz	Non-Interlaced	Off	On
72.3Hz	Non-Interlaced	On	On

FONT SELECTION	
Setting	SW1/5
Standard Fonts	Off
TUV Fonts	On
Note: TUV is the German standard for character spacing, and may not be compatible with some DOS applications.	