


CARDEXPERT TECHNOLOGY, INC.
CARDEX W32 XVGA VLB

Category	Video
Video Types Supported	XVGA
Video Processor	ET4000/W32
Highest Resolution Supported	1280 X 1024
Data Bus Type	32-bit VESA Local Bus
Memory Type	DRAM
Maximum Onboard Memory	2048KB

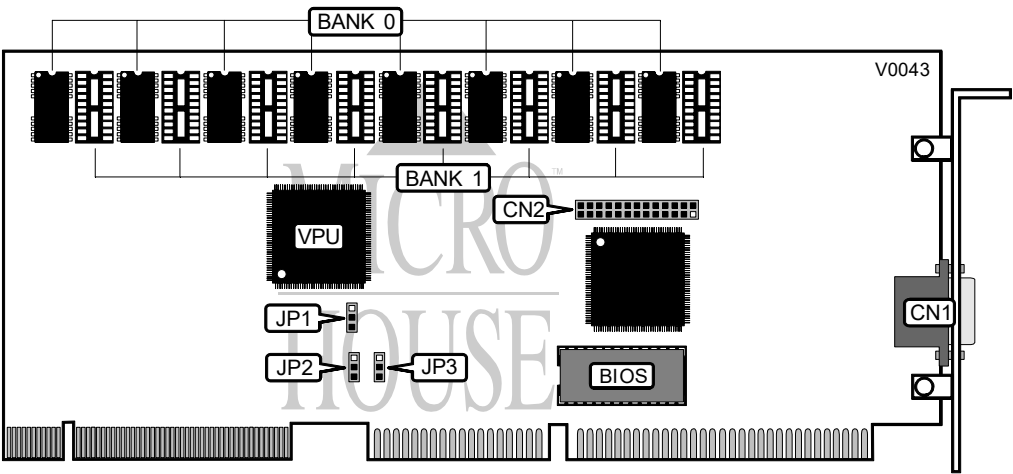

CONNECTIONS			
Purpose	Location	Purpose	Location
15-pin analog video port	CN1	VESA Feature connector	CN2

INTERRUPT SELECTION	
IRQ 2/9	JP1
Disabled	Pins 1 & 2 closed
Enabled	Pins 2 & 3 closed

WAIT STATE SELECTION			
Memory wait state	I/O wait state	P2	P3
1	3	Pins 1 & 2 closed	Pins 1 & 2 closed
2	4	Pins 2 & 3 closed	Pins 1 & 2 closed
3	3	Pins 1 & 2 closed	Pins 2 & 3 closed
4	4	Pins 2 & 3 closed	Pins 2 & 3 closed

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
1024KB	(8) 44256	NONE
2048KB	(8) 44256	(8) 44256