


BEHAVIOR TECH COMPUTER CORPORATION
VIDEOFLEX

Category	Video
Video Types Supported	VGA
Video Processor	SAA9051
Highest Resolution Supported	800 x 600
Data Bus Type	16-bit ISA
Memory Type	DRAM
Maximum Onboard Memory	256KB

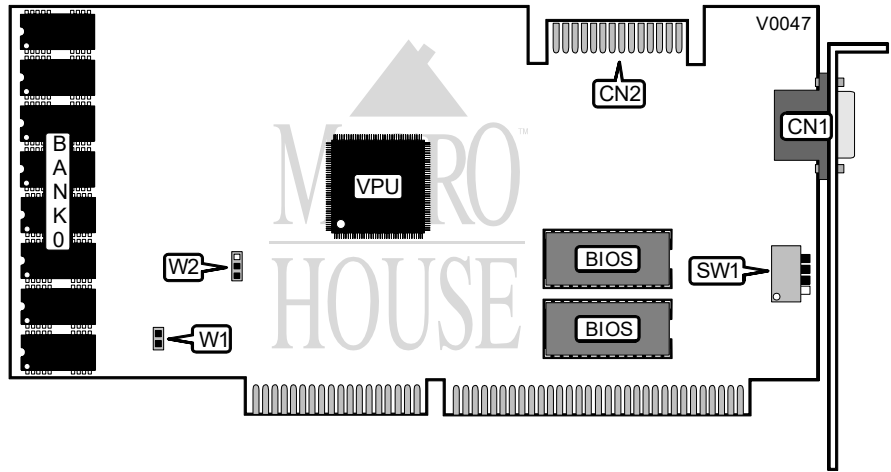

CONNECTIONS			
Purpose	Location	Purpose	Location
15-pin analog video port	CN1	VGA feature connector	CN2

MANUAL 16-BIT BIOS CONFIGURATION	
W1	Setting
Initial setup and normal operation	Closed
Note: W1 should remain in the closed position unless the 16TEST program has been successfully run and removing the jumper from W1 is recommended.	

FACTORY CONFIGURED - DO NOT ALTER	
Jumper/Switch	Position
W2	Pins 1 & 2 closed
SW1/3	Off

Continued on next page . . .

BEHAVIOR TECH COMPUTER CORPORATION

VIDEOFLEX

. . . continued from previous page

DISPLAY TIMING SELECTION	
Timing	SW1/1
í Standard PS/2 compatible display timing	Off
Special multi-frequency display timing	On

VGA MODE SWITCHING CONFIGURATION	
Mode	SW1/2
í PS/2 style	On
PC/AT style	Off

AUTOSENSE SELECTION	
Mode	SW1/4
í Autosense for 16-bit BIOS enabled	On
Autosense disabled, force 8-bit BIOS	Off