


EPSON, INC.  
VGA ADAPTER

Category	Video
Video Types Supported	VGA
Video Processor	C & T
Highest Resolution Supported	600 X 480
Data Bus Type	16-bit ISA
Memory Type	DRAM
Maximum Onboard Memory	256KB

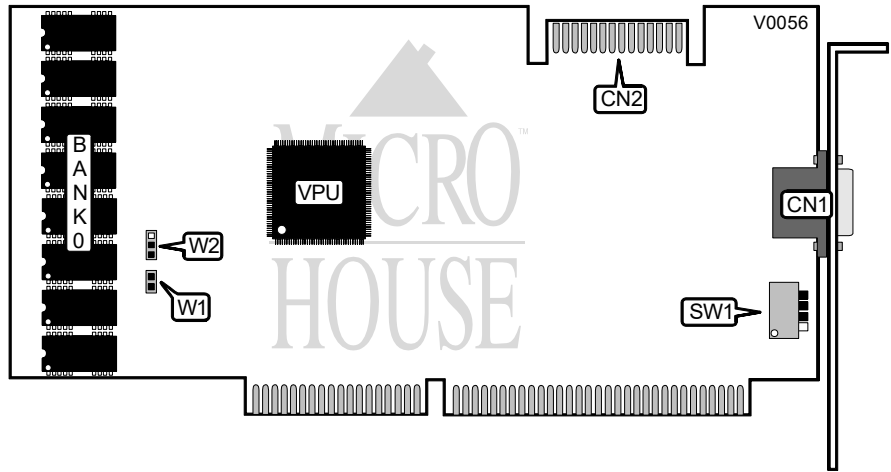

CONNECTIONS			
Purpose	Location	Purpose	Location
15-pin analog video port	CN1	VGA feature connector	CN2

MANUAL 16-BIT BIOS CONFIGURATION	
Setting	W1
Initial setup and normal operation	Closed
Note: W1 should remain in the closed position unless the 16TEST program has been run and it recommends removing the jumper.	

FEATURE CONNECTOR CONFIGURATION	
Setting	W2
Disabled	Pins 1 & 2 closed
Enabled	Pins 2 & 3 closed

Continued on next page . . .

EPSON, INC.  
VGA ADAPTER

... continued from previous page

TIMING SELECTION	
Timing	SW1/1
í Standard VGA timing	Off
Special timing for multi-frequency monitors	On

VGA MODE SWITCHING SELECTION	
Mode	SW1/2
í PS/2 style	On
PC/AT style	Off

AUTONSENSE CONFIGURATION	
Setting	SW1/4
í Enabled	On
Disabled	Off

FACTORY CONFIGURED - DO NOT ALTER	
Switch	Position
Switch1/3	Off