


DTK COMPUTER, INC.  
PTI-218B

Category	Video
Video Types Supported	CGA/EGA/Monochrome/VGA/XVGA
Video Processor	SMART
Highest Resolution Supported	1024 x 768
Data Bus Type	16-bit ISA
Memory Type	DRAM
Maximum Onboard Memory	512KB

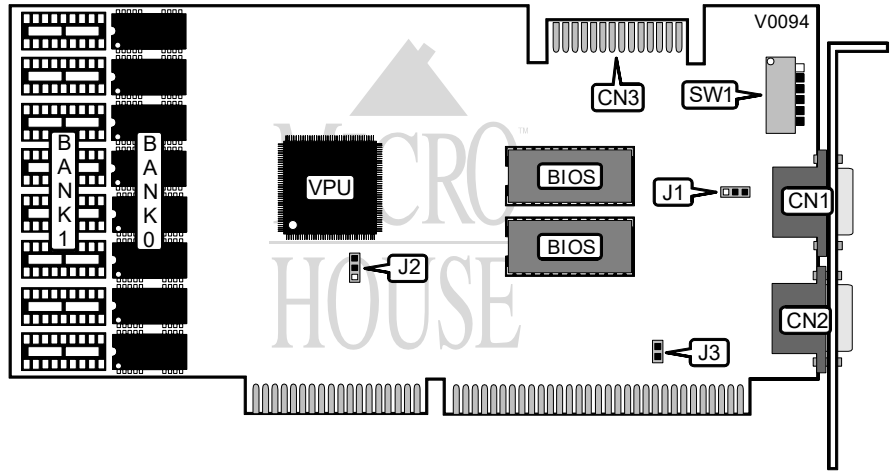

CONNECTIONS			
Purpose	Location	Purpose	Location
9-pin analog video port	CN1	VGA feature connector	CN3
15-pin analog video port	CN2		

VIDEO DISPLAY SELECTION	
Display	J1
EGA, VGA	Pins 1 & 2 closed
MDA, CGA	Pins 2 & 3 closed

BIOS BUS SIZE SETLECTION		
Setting	2	Size 1/6
Auto Detection for AT or compatibles	Pins 2 & 3 closed	On
Auto Detection for COMPAQ, Micronics systems	Pins 1 & 2 closed	On
Force to 8-bit BIOS	Open	Off

Continued on next page . . .

DTK COMPUTER, INC.  
PTI-218B

. . . continued from previous page

VIDEO INTERRUPT SELECTION	
IRQ9	J3
í Disabled	Open
Enabled	Closed

MONITOR TYPE SELECTION				
Type	S\ '1/switch 1	S\ '1/switch 2	S\ '1/switch 3	S\ '1/switch 4
í VGA or Multi-sync	On	On	On	On
EGA	Off	On	On	On
CGA	On	Off	On	On
MDA	Off	Off	On	On

MEMORY ADDRESS DECODING CONFIGURATION	
Setting	SW1/5
í Fast	Off
Slow	On

DRAM CONFIGURATION		
Size	Bank (	Bank '
256KB	(8) 41256	None
512KB	(8) 41256	(8) 41256