


MYLEX CORPORATION

GLI911

Category	Video
Video Types Supported	XVGA
Video Processor	S3
Highest Resolution Supported	1024 x 768
Data Bus Type	16-bit ISA
Memory Type	VRAM
Maximum Onboard Memory	1024KB

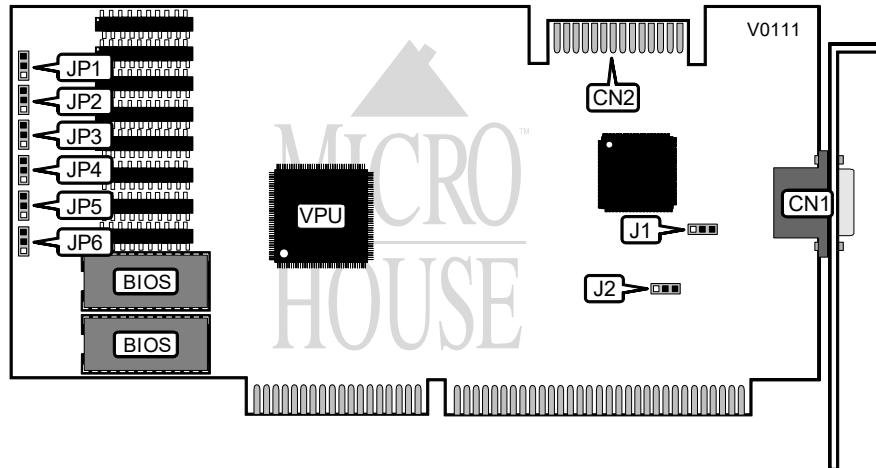

CONNECTIONS			
Purpose	Location	Purpose	Location
15-pin analog video port	CN1	VGA feature connector	CN2

DAC SIZE SELECTION	
Size	J1
Triple 6-bit	Pins 1 & 2 closed
Triple 8-bit	Pins 2 & 3 closed

BUS SIZE SELECTION	
Size	JP1
16-bit	Open
8-bit	Closed

MONITOR TYPE SELECTION	
Type	J2
IBM PS/2	Pins 1 & 2 closed
Non-IBM type	Pins 2 & 3 closed

Continued on next page . . .

MYLEX CORPORATION
GLI911

... continued from previous page

PAGE MODE SELECTION	
Mode	JP3
100ns	Pins 2 & 3 closed
80ns	Pins 1 & 2 closed

640 x 480 REFRESH RATE SELECTION			
Rate	P4	P5	P6
60Hz	Pins 2 & 3 closed	Pins 2 & 3 closed	Pins 2 & 3 closed
70Hz	Pins 1 & 2 closed	Pins 2 & 3 closed	Pins 2 & 3 closed

800 x 600 REFRESH RATE SELECTION			
Rate	P4	P5	P6
60Hz	Pins 2 & 3 closed	Pins 1 & 2 closed	Pins 2 & 3 closed
70Hz	Pins 1 & 2 closed	Pins 1 & 2 closed	Pins 2 & 3 closed
56Hz	Pins 2 & 3 closed	Pins 2 & 3 closed	Pins 1 & 2 closed

1024 x 768 REFRESH RATE CONFIGURATION				
Rate	Mode	JP4	JP5	JP6
43Hz	Interlaced	Pins 1 & 2 closed	Pins 2 & 3 closed	Pins 1 & 2 closed
60Hz	Non-Interlaced	Pins 2 & 3 closed	Pins 1 & 2 closed	Pins 1 & 2 closed

VRAM CONFIGURATION			
Size	Bank 0	Bank 1	P2
512KB	(4) 256K x 9 ZIP	None	Pins 1 & 2 closed
1024KB	(4) 256K x 9 ZIP	(4) 256K x 9 ZIP	Pins 2 & 3 closed
Note: Memory is installed at the factory. JP2 is not user configurable.			