


MYLEX CORPORATION

GLE911

Category	Video
Video Types Supported	XVGA
Video Processor	S3
Highest Resolution Supported	1024 x 768
Data Bus Type	16-bit EISA
Memory Type	VRAM
Maximum Onboard Memory	1024KB

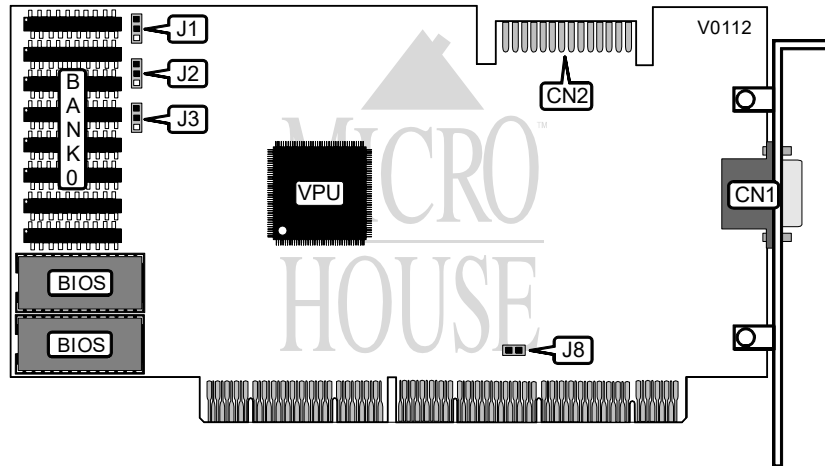

CONNECTIONS			
Purpose	Location	Purpose	Location
15-pin analog video port	CN1	VGA feature connector	CN2

VIDEO INTERRUPT SELECTION	
IRQ 2/9	J8
Disabled	Open
Enabled	Closed

640 x 480 REFRESH RATE SELECTION			
Rate	J1	J2	J3
60Hz	Pins 1 & 2 closed	Pins 1 & 2 closed	Pins 1 & 2 closed
70Hz	Pins 2 & 3 closed	Pins 1 & 2 closed	Pins 1 & 2 closed

Continued on next page . . .

MYLEX CORPORATION
GLE911

... continued from previous page

800 x 600 REFRESH RATE SELECTION			
Rate	J1	J2	J3
60Hz	Pins 1 & 2 closed	Pins 2 & 3 closed	Pins 2 & 3 closed
70Hz	Pins 2 & 3 closed	Pins 2 & 3 closed	Pins 1 & 2 closed
56Hz	Pins 1 & 2 closed	Pins 1 & 2 closed	Pins 2 & 3 closed

1024 x 768 REFRESH RATE CONFIGURATION				
Rate	Mode	J1	J2	J3
43Hz	Interlaced	Pins 2 & 3 closed	Pins 1 & 2 closed	Pins 2 & 3 closed
60Hz	Non-Interlaced	Pins 1 & 2 closed	Pins 2 & 3 closed	Pins 2 & 3 closed
72Hz	Non-Interlaced	Pins 2 & 3 closed	Pins 2 & 3 closed	Pins 2 & 3 closed