


COLORGRAPHIC COMMUNICATIONS CORPORATION

WARP 2

Category Video
Video Types Supported XVGA
Video Processor ET4000
Highest Resolution Supported 1024 X 768
Data Bus Type 16-bit ISA
Memory Type VRAM
Maximum Onboard Memory 2048KB

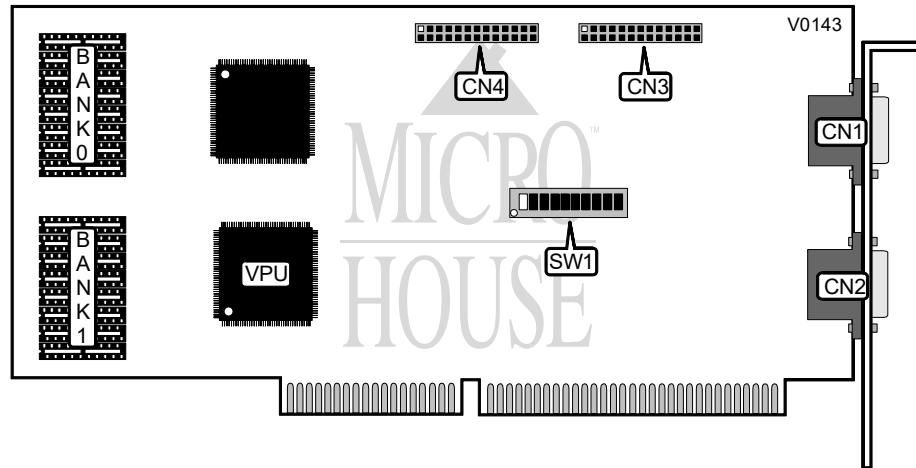

CONNECTIONS			
Purpose	Location	Purpose	Location
15 pin analog video port	CN1	VGA feature connector	CN3
15 pin analog video port	CN2	VGA feature connector	CN4

ID ADAPTER CONFIGURATION				
Adapter ID	ID0	ID1	SW1/switch 1	SW2/switch 2
1	0	0	On	On
2	1	0	On	Off
3	0	1	Off	On
4	1	1	Off	Off

CONTROL PORT ADDRESS SELECTION			
Primary	Secondary	SW1/3	SW2/4
34Ch	348h	Off	On
32Ch	328h	On	On
33Ch	338h	On	Off
35Ch	358h	Off	Off

Continued on next page . . .

COLORGRAPHIC COMMUNICATIONS CORPORATION

WARP 2

... continued from previous page

INTERRUPT GENERATION SELECTION		
IRQ 2/9	SW1/8	SW1/7
Disabled	Off	Off
Enabled	On	On

WAIT STATE CONFIGURATION		
Setting	SW1/6	SW1/5
Enabled	On	On
Disabled	Off	Off

FACTORY CONFIGURED - DO NOT ALTER	
Switch	Position
SW1/9	On
SW1/10	On

VRAM CONFIGURATION		
Size	Bank 1	Bank 2
1024KB	(8) 256K x 9 ZIP	None
2048KB	(8) 256K x 9 ZIP	(8) 256K x 9 ZIP