


# COLORGRAPHIC COMMUNICATIONS CORPORATION

## SUPER DUAL VGA

**Category** Video  
**Video Types Supported** XVGA  
**Video Processor** ET4000  
**Highest Resolution Supported** 1024 X 768  
**Data Bus Type** 16-bit ISA  
**Memory Type** DRAM  
**Maximum Onboard Memory** 512KB

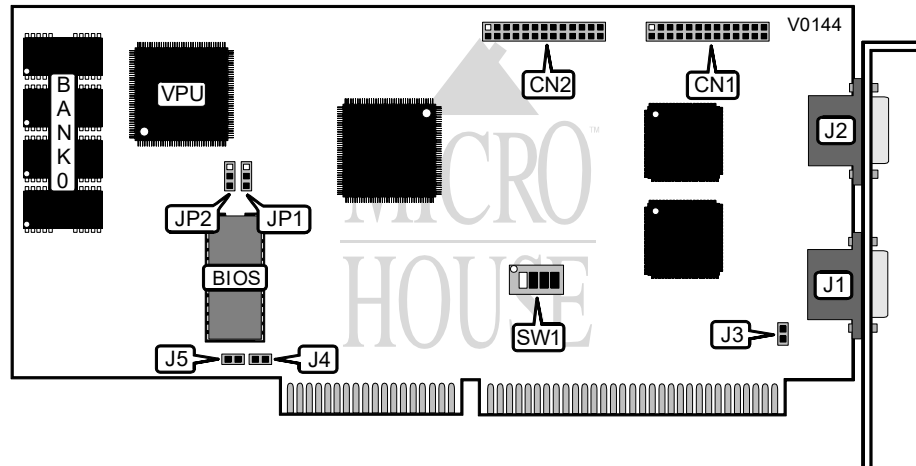

CONNECTIONS			
Purpose	Location	Purpose	Location
VGA feature connector	CN1	15 pin analog video port	J1
VGA feature connector	CN2	15 pin analog video port	J2

CONTROL PORTS ADDRESS SELECTION			
Primary	Secondary	S V1/1	S V1/2
34Ch	348h	Off	On
32Ch	328h	On	On
33Ch	338h	On	Off
35Ch	358h	Off	Off

ID ADAPTER CONFIGURATION				
Adapter ID	ID0	ID1	SW1/3	SW1/4
0	0	0	On	On
1	1	0	On	Off
2	0	1	Off	On
3	1	1	Off	Off

Continued on next page . . .

COLORGRAPHIC COMMUNICATIONS CORPORATION  
SUPER DUAL VGA

... continued from previous page

INTERRUPT SELECT CONFIGURATION	
IRQ J3	
í Disabled	Open
Enabled	Closed

ZERO WAIT STATE CONFIGURATION	
Setting J4	
í Enabled	Closed
Disabled	Open

EPROM CONFIGURATION			
Type	Size	P1	P2
í 28 pin	í Non-4Mb EPROM	Closed	Closed
32 pin	4Mb EPROM	Open	Open

FACTORY CONFIGURED - DO NOT ALTER	
Jumper	Position
J5	Closed