


COLORGRAPHIC COMMUNICATIONS CORPORATION  
DUAL LIGHTNING

Category	Video
Video Types Supported	XVGA
Video Processor	ET4000
Highest Resolution Supported	1024 x 768
Data Bus Type	32-bit VESA Local Bus
Memory Type	DRAM
Maximum Onboard Memory	4096KB

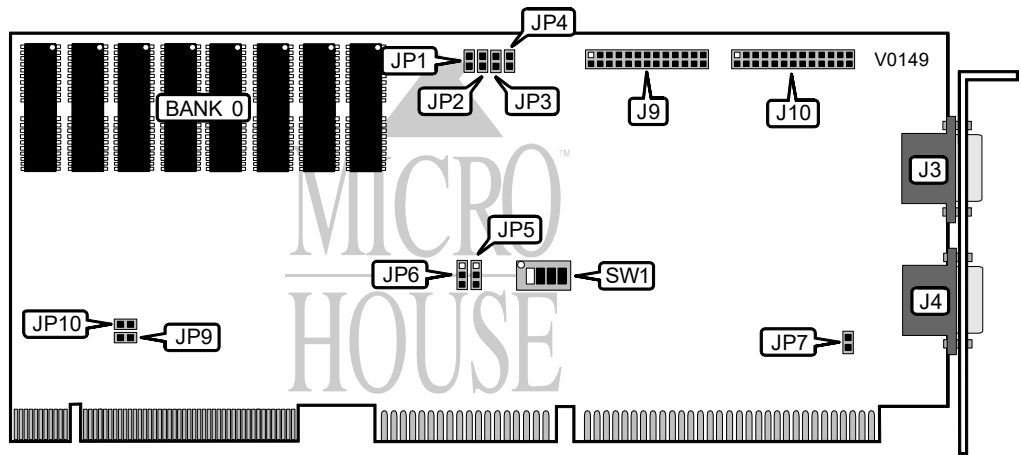

CONNECTIONS			
Purpose	Location	Purpose	Location
15-pin analog video port	J3	VGA feature connector	J9
15-pin analog video port	J4	VGA feature connector	J10

WAIT STATE SELECTION		
Setting	JP1	JP2
4	Closed	Closed
3	Open	Closed
2	Closed	Open
1	Open	Open

BASE I/O ADDRESS SELECTION		
Address	SW1/	SW1/
348h - 34Fh	Off	On
328h - 32Fh	Off	Off
338h - 33Fh	On	Off
358h - 35Fh	On	On

Continued on next page . . .

COLORGRAPHIC COMMUNICATIONS CORPORATION  
DUAL LIGHTNING

... continued from previous page

ADAPTER ID CONFIGURATION		
ID	SW1/2	SW1/4
0	On	On
1	Off	On
2	On	Off
3	Off	Off

FACTORY CONFIGURED - DO NOT ALTER	
Jumper	Position
JP3	Closed
JP4	Closed
JP5	Closed
JP6	Closed
JP9	Closed
JP10	Closed