


# ELITEGROUP COMPUTER SYSTEMS, INC.

## VI-911

<b>Category</b>	Video
<b>Video Types Supported</b>	XVGA
<b>Video Processor</b>	S3 86C911
<b>Highest Resolution Supported</b>	1024 X 768
<b>Data Bus Type</b>	32-bit VESA Local Bus
<b>Memory Type</b>	VRAM
<b>Maximum Onboard Memory</b>	1024KB

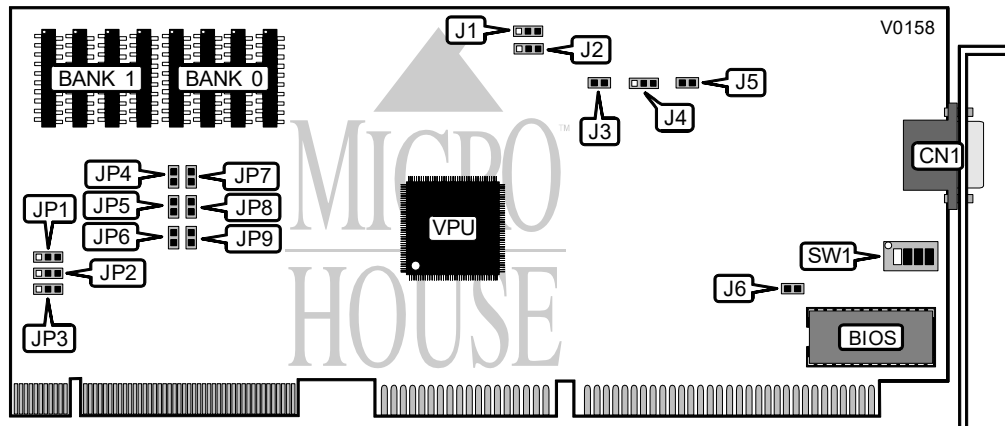

CONNECTIONS	
Purpose	Location
15-pin analog video connector	CN1

PAGE MODE SELECTION	
Mode	J1
Standard	Pins 2 & 3 closed
Fast	Pins 1 & 2 closed

ADS INPUT SELECTION	
Setting	JP2
Normal	Pins 1 & 2 closed
Delay	Pins 2 & 3 closed

VIDEO INTERRUPT SELECT CONFIGURATION	
Interrupt	J6
Enabled	Closed
Disabled	Open

Continued on next page . . .

ELITEGROUP COMPUTER SYSTEMS, INC.  
VI-911

... continued from previous page

MONITOR TYPE SELECTION				
Type	Resolution	SW1/1	SW1/2	SW1/3
VGA	640 x 480	On	On	On
Multisync 3D	640 x 480	On	On	Off
Multisync 3D	800 x 600	On	Off	On
Multisync 4D	800 x 600	On	Off	Off
Multisync 2A	800 x 600	Off	On	On
Multisync 2A	1024 x 768	Off	On	Off
Multisync 4D	1024 x 768	Off	Off	On
Multisync 5D	1024 x 768	Off	Off	Off

FACTORY CONFIGURED - DO NOT ALTER	
Jumper/Switch	Position
J3	Closed
J4	Pins 2 & 3 closed
J5	Open
JP1	Pins 1 & 2 closed
JP3	Pins 1 & 2 closed
JP4	Closed
JP5	Closed
JP6	Closed
JP7	Closed
JP8	Open
JP9	Pins 1 & 2 closed
SW1/switch 4	Off

VRAM CONFIGURATION			
Size	Bank 0	Bank 1	J2
512KB	256K x 4 ZIP	NONE	Pins 1 & 2 closed
1024KB	256K x 4 ZIP	256K x 4 ZIP	Pins 2 & 3 closed