


# KOUWELL ELECTRONIC CORPORATION

## KW-524F

<b>Card Type</b>	Multi I/O card
<b>Chipset/Controller</b>	Krueger company
<b>I/O Options</b>	Parallel port, serial ports (2)
<b>Maximum DRAM</b>	N/A

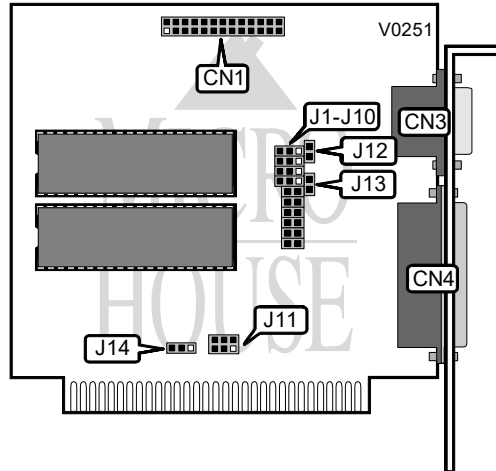

CONNECTIONS			
Purpose :	Location	Purpose :	Location
Serial port 2	CN1	Parallel port	CN4
Serial port 1	CN3		

SERIAL PORT CONFIGURATION									
Port 1	Port 2	J1	J2	J3	J4	J5	J6	J8	J10
COM1/IRQ4	COM2/IRQ3	2 & 3	2 & 3	1 & 2	Open	Open	Closed	Closed	Open
COM1/IRQ4	Disabled	Open	Open	1 & 2	Open	Open	Closed	Open	Open
Disabled	COM2/IRQ3	Open	2 & 3	Open	Open	Open	Open	Closed	Open
COM3/IRQ5	COM4/IRQ2	Open	Open	Open	1 & 2	Closed	Open	Open	Closed
COM3/IRQ5	Disabled	Open	Open	Open	1 & 2	Closed	Open	Open	Open
Disabled	COM2/IRQ4	2 & 3	Open	Open	Open	Open	Open	Open	Closed

Note: Jumpers J7, J9, J12, and J13 should be left in the open position.  
Pins designated should be in the closed position.

Continued on next page . . .

KOUWELL ELECTRONIC CORPORATION  
KW-524F

... continued from previous page

PARALLEL PORT CONFIGURATION	
LPT	J11
1	Pins 1 & 2 closed
2	Pins 3 & 4 closed
3	Pins 5 & 6 closed

PARALLEL PORT CONFIGURATION	
IRQ	J14
7	Pins 1 & 2 closed
5	Pins 2 & 3 closed