


DTK COMPUTER, INC.
MINI/MICRO-4 FDC, PII-158B

Card Type	Floppy drive controller
Chipset/Controller	Unknown
I/O Options	Floppy drive interface (2)
Maximum DRAM	N/A

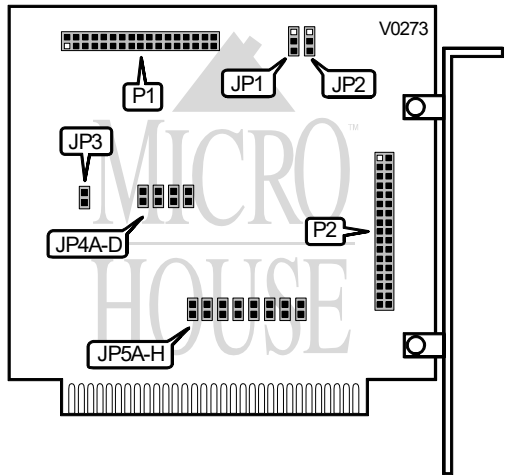

CONNECTIONS			
Pin position	Location	Pin position	Location
Floppy drive interface	P1	Floppy drive interface	P2

FLOPPY DRIVE SPEED SETTING	
Speed Setting	JP1
Single	Pins 1 & 2 closed
Dual	Pins 2 & 3 closed

Continued on next page . . .

DTK COMPUTER, INC.
MINI/MICRO-4 FDC, PII-158B

... continued from previous page

FLOPPY DRIVE DATA RATE		
Data Rate KB/s)	Precompensa on (ns)	JP2
500	125	Pins 2 & 3 closed
250	125	Pins 2 & 3 closed
300	125	Pins 2 & 3 closed
250	125	Pins 2 & 3 closed
250	125	Pins 2 & 3 closed
1000	83	Pins 2 & 3 closed
1000	83	Pins 2 & 3 closed
500	125	Pins 1 & 2 closed
125	250	Pins 1 & 2 closed
125	208	Pins 1 & 2 closed
125	250	Pins 1 & 2 closed
125	250	Pins 1 & 2 closed
1000	83	Pins 1 & 2 closed
1000	83	Pins 1 & 2 closed

SYSTEM TYPE CONFIGURATION	
Type	JP3
i XT/compatible	Closed
AT/compatible	Open

FLOPPY DRIVE ADDRESS SETTINGS				
Address	JP4/A	JP4/B	JP4/C	JP4/D
CA000h-CBFFFh	Closed	Open	Closed	Open
CC000h-CDFFFh	Open	Closed	Open	Closed
CE000h-CFFFFh	Closed	Open	Open	Closed

[illegible]