


**UNIDENTIFIED**  
**CT-8190S**

<b>Category</b>	Video
<b>Video Types Supported</b>	CGA, EGA, Monochrome
<b>Video Processor</b>	Unidentified
<b>Highest Resolution Supported</b>	720 x 348
<b>Data Bus Type</b>	8-bit ISA
<b>Memory Type</b>	DRAM
<b>Maximum Onboard Memory</b>	256KB

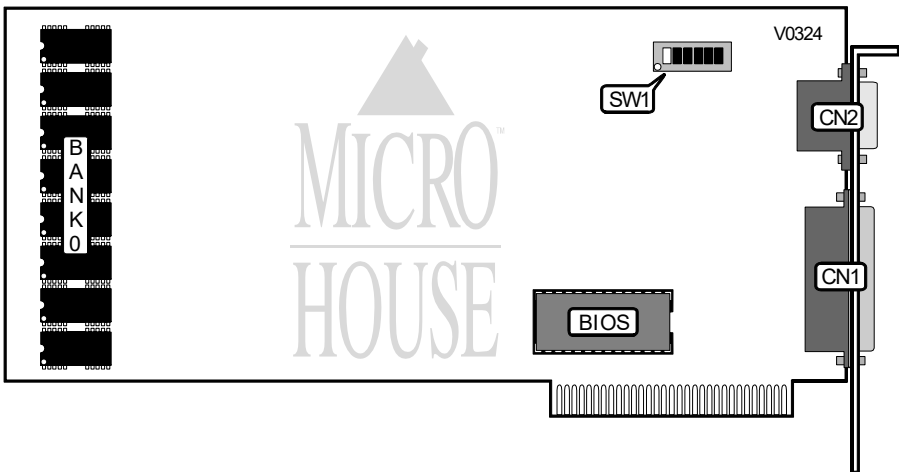

CONNECTIONS			
Purpose :	Location	Purpose :	Location
Parallel port	CN1	15-pin analog video port	CN2

DISPLAY CONFIGURATION				
Display Mode	SW1/1	SW1/2	SW1/3	SW1/4
Monochrome	Off	Off	On	Off
Color (40 x 25)	On	Off	Off	On
Color (80 x 25)	Off	Off	Off	On
Enhanced color (normal mode)	On	On	On	Off
Enhanced color (enhanced mode)	Off	On	On	Off
Note: These settings apply when the CT-8190S is the only display adapter in the system.				

Continued on next page . . .

# UNIDENTIFIED

## CT-8190S

... continued from previous page

DUAL DISPLAY CONFIGURATION					
Primary Mode	Secondary Mode	SW1/1	SW1/2	SW1/3	SW1/4
Color (40 x 25)	Monochrome or none	On	Off	Off	On
Color (80 x 25)	Monochrome or none	Off	Off	Off	On
Enhanced color (normal mode)	Monochrome or none	On	On	On	Off
Enhanced color (enhanced mode)	Monochrome or none	Off	On	On	Off
Note: These settings apply when the CT-8190S and a monochrome display adapter are both installed in the monochrome as the secondary display type.					

DUAL DISPLAY CONFIGURATION					
Primary Mode	Secondary Mode	SW1/1	SW1/2	SW1/3	SW1/4
Monochrome	Color (40 x 25)	On	On	On	On
Monochrome	Color (80 x 25)	Off	On	On	On
Monochrome	None	Off	On	On	On
Monochrome	Enhanced color (normal mode)	On	Off	On	On
Monochrome	Enhanced color (enhanced mode)	Off	Off	On	On
Note: These settings apply when the CT-8190S and monochrome adapters are both installed in the system, with the monochrome as the primary display and the CT-8190S as secondary display in the Color or Enhanced color mode.					

DUAL DISPLAY CONFIGURATION					
Primary Mode	Secondary Mode	SW1/1	SW1/2	SW1/3	SW1/4
Monochrome	None	Off	Off	On	Off
Monochrome	Color (40 x 25)	On	Off	On	Off
Monochrome	Color (80 x 25)	Off	Off	On	Off
Note: These settings apply when the CT-8190S and CGA are both installed in the system, with the CT-8190S as the primary display adapter in monochrome mode.					

DUAL DISPLAY CONFIGURATION					
Primary Mode	Secondary Mode	SW1/1	SW1/2	SW1/3	SW1/4
Color (40 x 25)	Monochrome or none	On	On	Off	On
Color (80 x 25)	Monochrome or none	Off	On	Off	On
Note: These settings apply when the CT-8190S and CGA are both installed in the system with the CGA adapter as the primary display and the CT-8190 in monochrome mode.					

MONITOR TYPE SELECT	
Type	SW1/5
IBM Color or Monochrome	On
Enhanced Color Display	Off

PARALLEL PORT CONFIGURATION	
Port	SW1/6
Enabled	Off
Disabled	On