


PROLINK COMPUTER, INC.
MVGA-P1DW (VERSION 1)

Category	Video
Video Type	XVGA
Video Processor	Western Digital
Highest Resolution	1280 x 1024
Supported	
Data Bus Type	16-bit ISA
Memory Type	DRAM
Maximum Onboard Memory	1MB

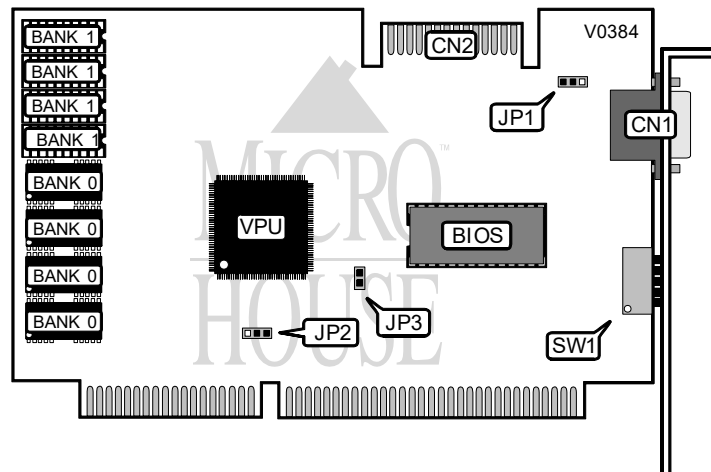

CONNECTIONS			
Purpos	Location	Purpos	Location
15-pin analog video port	CN1	VESA Feature connector	CN2

MONITOR SELECTION	
Setting	JP1
Color	Pins 2 & 3 closed
Monochrome	Pins 1 & 2 closed

CPU MATCHING	
Setting	JP2
80386/80486	Pins 1 & 2 closed
80286	Pins 2 & 3 closed

ZERO WAIT STATE	
Setting	JP3
Enabled	Closed
Disabled	Open

Continued on next page . . .

PROLINK COMPUTER, INC.
MVGA - P1DW (VERSION 1)

... continued from previous page

800 X 600 REFRESH RATES		
Refresh	SW1/switch 1	SW1/switch 2
i 56Hz Non-interlaced	Off	Off
60Hz Non-interlaced	Off	On
72Hz Non-interlaced	On	Off
80Hz Non-interlaced	On	On

1024 x 768 REFRESH RATES		
Refresh	SW1/switch 3	SW1/switch 4
i 87Hz Interlaced	Off	Off
60Hz Non-interlaced	Off	On
70Hz Non-interlaced	On	Off
72Hz Non-interlaced	On	On

HORIZONTAL SCAN RATE SELECTION	
Purpose	SW1/switch 5
i 31.5KHz	Off
40KHz	On

VIDEO MEMORY CONFIGURATION		
Size	Bank 0	Bank 1
i 512KB	(4) 256 x 4	NONE
1MB	(4) 256 x 4	(4) 256 x 4