


PROLINK COMPUTER, INC.
MVGA-P1DW (VERSION 2)

Category	Video
Video Type	XVGA
Video Processor	Western Digital
Highest Resolution Supported	1280 x 1024
Data Bus Type	16-bit ISA
Memory Type	DRAM
Maximum Onboard Memory	1MB

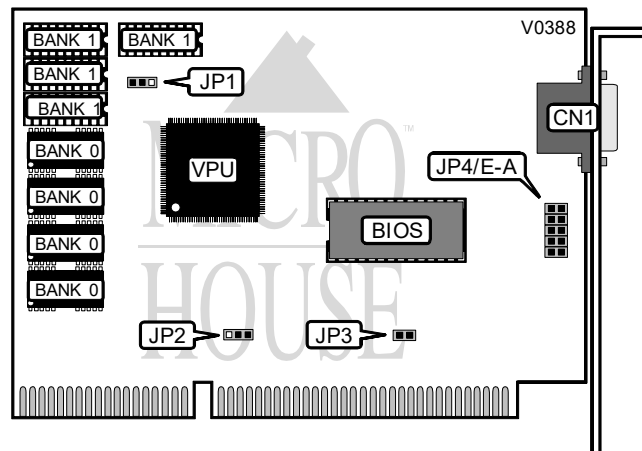

CONNECTIONS	
Purpose	Location
15-pin analog video port	CN1

MONITOR SELECTION	
Setting	JP1
i Color	Pins 2 & 3 closed
Monochrome	Pins 1 & 2 closed

CPU MATCHING	
Setting	JP2
i 80386/80486	Pins 1 & 2 closed
80286	Pins 2 & 3 closed

ZERO WAIT STATE	
Setting	JP3
i Enabled	Closed
Disabled	Open

Continued on next page . . .

PROLINK COMPUTER, INC.
MVGA - P1DW (VERSION 2)

. . . continued from previous page

800 X 600 REFRESH RATES		
Refresh	JP4/A	JP4/B
i 56Hz Non-interlaced	Open	Open
60Hz Non-interlaced	Open	Closed
72Hz Non-interlaced	Closed	Open
80Hz Non-interlaced	Closed	Closed

1024 x 768 REFRESH RATES		
Refresh	JP4/C	JP4/D
i 87Hz Interlaced	Open	Open
60Hz Non-interlaced	Open	Closed
70Hz Non-interlaced	Closed	Open
72Hz Non-interlaced	Closed	Closed

HORIZONTAL SCAN RATE SELECTION	
Purpose	JP4/E
i 31.5KHz	Open
40KHz	Closed

VIDEO MEMORY CONFIGURATION		
Size	Bank 0	Bank 1
i 512KB	(4) 256 x 4	NONE
1MB	(4) 256 x 4	(4) 256 x 4