


PROLINK COMPUTER, INC.
MVGA-P1D

Category	Video
Video Type	XVGA
Video Processor	Western Digital
Highest Resolution Supported	1280 x 1024
Data Bus Type	16-bit ISA
Memory Type	DRAM
Maximum Onboard Memory	1MB

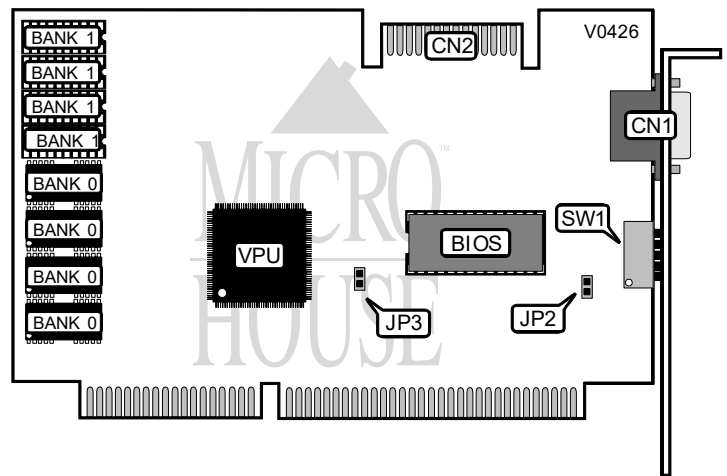

CONNECTIONS			
Purpos	Location	Purpos	Location
15-pin analog video port	CN1	VESA Feature connector	CN2

ZERO WAIT STATE	
Setting	JP3
Enabled	Closed
Disabled	Open

800 X 600 REFRESH RATES		
Refresh	SW1/switch 1	SW1/switch 2
56Hz Non-interlaced	Off	Off
56Hz Non-interlaced	On	On
72Hz Non-interlaced	On	Off
60Hz Non-interlaced	Off	On

Continued on next page . . .

PROLINK COMPUTER, INC.
MVGA-P1D

. . . continued from previous page

1024 x 768 REFRESH RATES		
Refresh	SW1/switch 3	SW1/switch 4
i Interlaced	Off	Off
60Hz Non-interlaced	Off	On
70Hz Non-interlaced	On	Off
72Hz Non-interlaced	On	On

HORIZONTAL SCAN RATE SELECTION	
Setting	SW1/switch 5
i 31.5KHz	Off
40KHz	On

VIDEO MEMORY CONFIGURATION		
Size	Bank 0	Bank 1
i 512KB	(4) 256 x 4	NONE
1MB	(4) 256 x 4	(4) 256 x 4

MEMORY BANK SELECTION	
Setting	JP2
i 512KB	Closed
1MB	Open