


**PROLINK COMPUTER, INC.**  
**MVGA-WDC33**

<b>Category</b>	Video
<b>Video Type</b>	XVGA
<b>Video Processor</b>	Western Digital
<b>Highest Resolution</b>	1280 x 1024
<b>Supported</b>	
<b>Data Bus Type</b>	16-bit VESA
<b>Memory Type</b>	DRAM
<b>Maximum Onboard Memory</b>	2MB

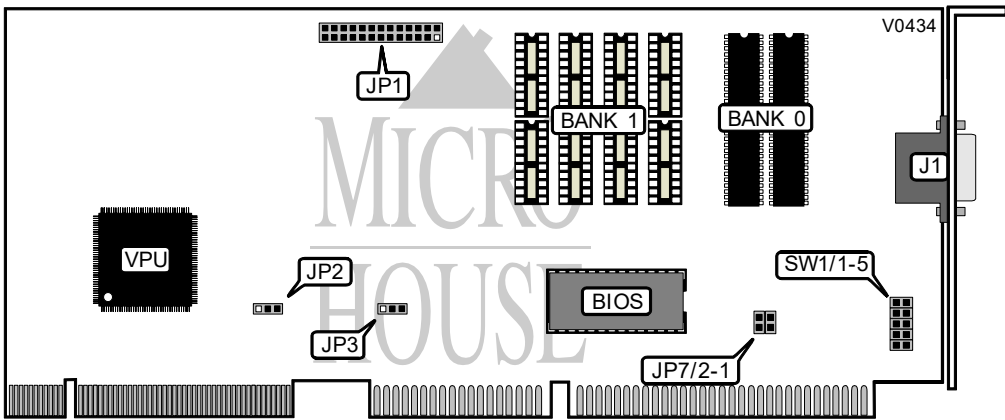

CONNECTIONS			
Purpos	Location	Purpos	Location
15-pin analog video port	J1	VESA Feature connector	JP1

DATA/COMMAND LINE	
Setting	JP2
Disabled	Pins 1 & 2 closed
Enabled	Pins 2 & 3 closed

CPU MATCHING	
Setting	JP3
80486	Pins 2 & 3 closed
80386	Pins 1 & 2 closed

MODE 3, 12, 5E, AND 5F REFRESH RATES	
Setting	JP7/1
72Hz	Closed
60Hz	Open

Continued on next page . . .

**PROLINK COMPUTER, INC.**  
**MVGA-WDC33**

. . . continued from previous page

ZERO WAIT STATE		
Setting	JP7/2	
í Disabled		Open
Enabled		Closed

800 X 600 REFRESH RATES		
Refresh	SW1/1	SW1/2
í 56Hz Non-interlaced	Open	Open
60Hz Non-interlaced	Open	Closed
72Hz Non-interlaced	Closed	Open
56Hz Non-interlaced	Closed	Closed

1024 x 768 REFRESH RATES		
Refresh	SW1/3	SW1/4
í 87Hz Interlaced	Open	Open
60Hz Non-interlaced	Open	Closed
70Hz Non-interlaced	Closed	Open
72Hz Non-interlaced	Closed	Closed

FONT SELECTION		
Setting	SW1/5	
í Standard font		Open
TUV font		Closed

VIDEO MEMORY CONFIGURATION		
Size	Bank 0	Bank 1
í 1MB	(4) 256K x 8	NONE
2MB	(4) 256K x 8	(8) 256K x 4

MISCELLANEOUS NOTES	
Bank 0 may be configured as (2) 256K x 16	