


PROLINK COMPUTER, INC. **SOUNDPLUS-AZBX2**

Category	Video
Video Type	XVGA
Video Processor	Cirrus Logic
Highest Resolution Supported	1280 x 1024
Data Bus Type	16-bit ISA
Memory Type	DRAM
Maximum Onboard Memory	1MB

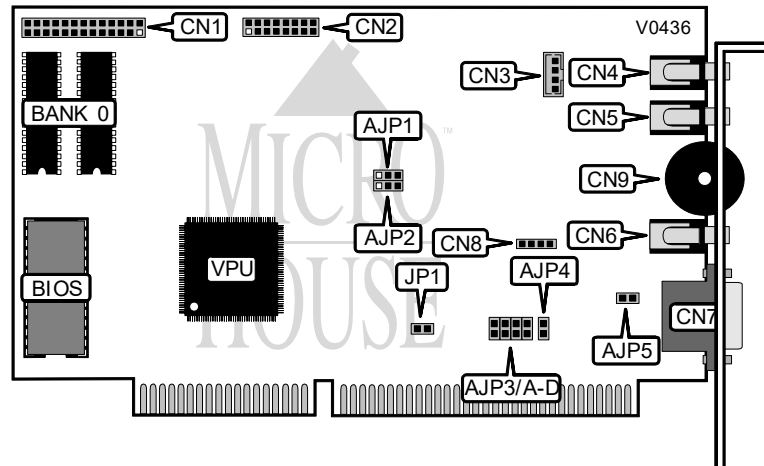

CONNECTIONS			
Purpose :	Location	Purpose :	Location
VESA feature connector	CN1	Speaker jack	CN6
15-pin game/MIDI port	CN2	15-pin analog video port	CN7
CD-ROM connector	CN3	Speaker	CN8
Audio line-in jack	CN4	Volume control	CN9
Microphone jack	CN5		

VGA MODE	
Setting	JP1
Enabled	Closed
Disabled	Open

GAME PORT MODE	
Setting	AJP1
Enabled	Open
Disabled	pins 1 & 2 closed

Continued on next page . . .

PROLINK COMPUTER, INC.
SOUNDPLUS-AZBX2

. . . continued from previous page

I/O BASE ADDRESS	
ADDRESS	AJP2
í 220h	pins 2 & 3 closed
240h	pins 1 & 2 closed

INTERRUPT SELECTION				
IRC	AJP3/A	AJP3/B	AJP3/C	AJP3/D
í IRQ7	Open	Open	Open	Closed
IRQ2	Closed	Open	Open	Open
IRQ3	Open	Closed	Open	Open
IRQ5	Open	Open	Closed	Open

ZERO WAIT STATE	
Setting	AJP4
í Enabled	Closed
Disabled	Open

SOUND MODE	
Setting	AJP5
í Enabled	Closed
Disabled	Open