


PROLINK COMPUTER, INC.
PIXELVIEW-T9510

Category	Video
Video Type	XVGA
Video Processor	PC View
Highest Resolution Supported	1024 x 768
Data Bus Type	16-bit ISA
Memory Type	DRAM
Maximum Onboard Memory	2MB

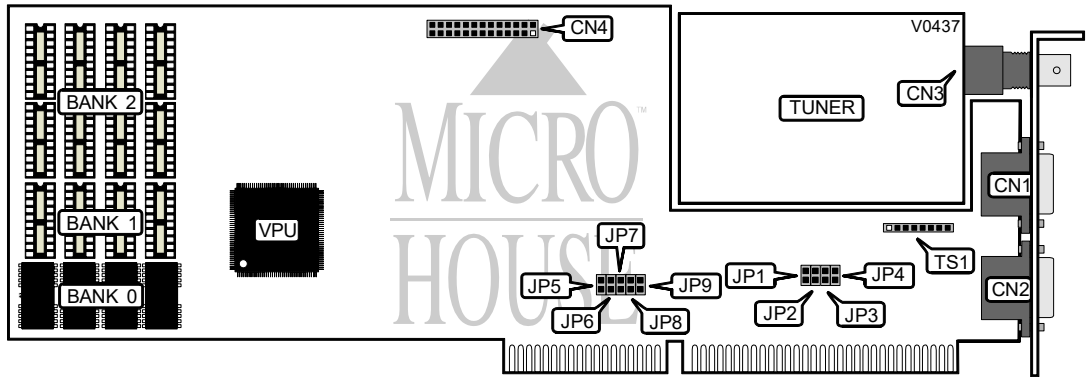

CONNECTIONS			
Purpose :	Location	Purpose :	Location
15-pin video/audio port	CN1	Tuner input	CN3
15-pin analog video port	CN2	VESA feature connector	CN4

FACTORY CONFIGURED SETTINGS	
Jumper	Setting
TS1 (test point)	Open
JP5	Open

Continued on next page . . .

PROLINK COMPUTER, INC.
PIXELVIEW-T9510

... continued from previous page

I/O BASE ADDRESS				
Address	JP1	JP2	JP3	JP4
280h	Closed	Closed	Closed	Open
200h	Closed	Closed	Closed	Closed
210h	Open	Closed	Closed	Closed
220h	Closed	Open	Closed	Closed
230h	Open	Open	Closed	Closed
240h	Closed	Closed	Open	Closed
250h	Open	Closed	Open	Closed
260h	Closed	Open	Open	Closed
270h	Open	Open	Open	Closed
290h	Open	Closed	Closed	Open
2A0h	Closed	Open	Closed	Open
2B0h	Open	Open	Closed	Open
2C0h	Closed	Closed	Open	Open
2D0h	Open	Closed	Open	Open
2E0h	Closed	Open	Open	Open
2F0h	Open	Open	Open	Open

INTERRUPT SELECTION				
IRC	JP6	JP7	JP8	JP9
IRQ10	Open	Closed	Open	Open
IRQ3	Open	Open	Closed	Open
IRQ7	Open	Open	Open	Closed
IRQ15	Closed	Open	Open	Open

VIDEO MEMORY CONFIGURATION			
Size	Bank 0	Bank 1	Bank 2
512KB	(4) 256K x 4	NONE	NONE
1MB	(4) 256K x 4	(4) 256K x 4	NONE
2MB	(4) 256K x 4	(4) 256K x 4	(8) 256K x 4