


RELIALOGIC CORPORATION PRIVATE, LTD.  
VP39CL

Category	Video
Video Types Supported	XVGA
Video Processor	Western Digital
Highest Resolution Supported	1024 x 768
Data Bus Type	16-bit ISA
Memory Type	DRAM
Maximum Onboard Memory	1MB

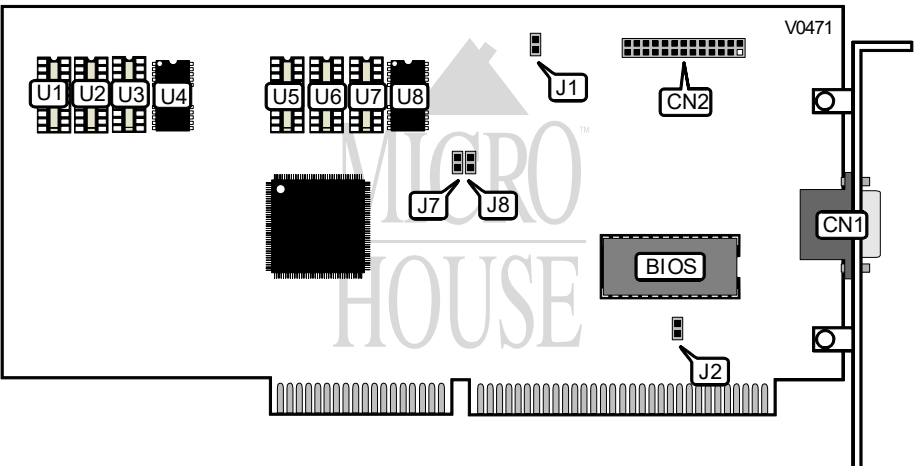

CONNECTIONS			
Purpose	Location	Purpose	Location
15-pin analog video port	CN1	Feature connector	CN2

FIRST STAGE ZERO WAIT STATE	
Setting	J2
if Enabled	Closed
Disabled	Open

SECOND STAGE ZERO WAIT STATE	
Setting	J1
if Enabled	Open
Disabled	Closed

NON-INTERLACED/INTERLACED	
Setting	J7
if Interlaced	Closed
Non-interlaced	Open

Continued on next page . . .

RELIALOGIC CORPORATION PRIVATE, LTD.  
VP39CL

... continued from previous page

BUS SIZE AUTODETECT	
Setting	J8
i Enabled	Open
Disabled	Closed

VIDEO MEMORY CONFIGURATION			
Size	U4 , U8	U3 , U7	U1, U2, J5 & U6
256KB	(2) 256K x 4	N/A	N/A
512KB	(2) 256K x 4	(2) 256K x 4	N/A
1MB	(2) 256K x 4	(2) 256K x 4	(4) 256K x 4