


CARDINAL TECHNOLOGIES, INC.
MB2296SR

Modem Type	Data (Asynchronous/Synchronous)/Fax
Maximum Data Rate	2400 bps
Maximum Fax Rate	9600 bps
Data Bus	8-bit ISA
Fax Class	Class I
Data Modulation Protocol	Bell 103A & 212A
Fax Modulation Protocol	ITU-T V.22bis & V.22 & V.21
Error Correction/Compression	ITU-T V.29 & V.27 GRP III
	None

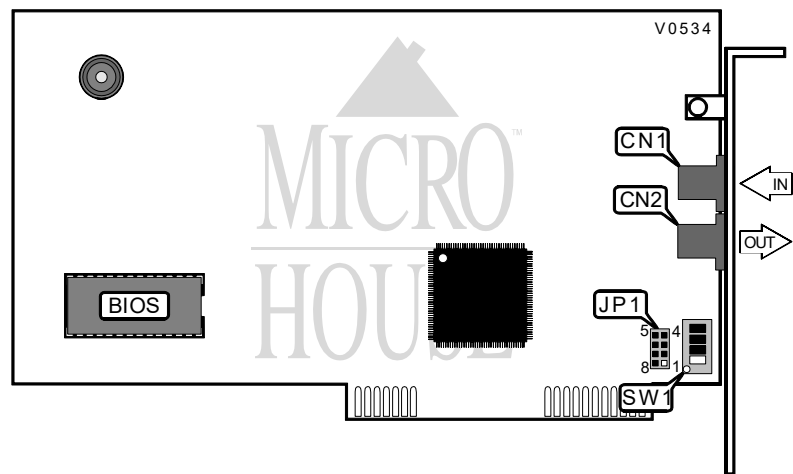

CONNECTIONS			
Purpose	Location	Purpose	Location
Line in	CN1	Line out	CN2

COM PORT SETTINGS					
COM/IRQ	JP1	SW1/1	SW/2	SW1/3	SW1/4
COM1 & IRQ4	Pins 1 & 8, 2 & 7, 3 & 6 closed	On	On	On	Off
COM2 & IRQ3	Pins 2 & 7, 4 & 5 closed	Off	On	Off	On
COM3 & IRQ4	Pins 1 & 8, 3 & 6 closed	On	Off	On	Off
COM4 & IRQ3	Pins 4 & 5 closed	Off	Off	Off	On

PROPRIETARY COMMAND SET		
Type:	Configuration	
Format:	ATS(register)=(Command Value)	
Example:	ATS12=50	
Description:	Writes to or reads from a specified register.	
Register	Command Value	Function

S12	50	General purpose register, un-used.
-----	----	------------------------------------

Continued on next page . . .

CARDINAL TECHNOLOGIES, INC.
MB2296SR

... continued from previous page

I - PROPRIETARY COMMAND		
Note:	The I Command request product code.	
Command	Protocol	
I3	Request software ID.	
I4	Request configuration.	

PROPRIETARY RESULT CODES		
Result code	Message	Description
9	CONNECT 600	Connect at 600bps