


OMNITEL, INC.  
T 2 4 0 0 - P C 1 / P C 2

Modem Type	Data (Asynchronous/Synchronous)
Maximum Data Rate	2400 bps
Maximum Fax Rate	N/A
Data Bus	8-bit ISA
Fax Class	N/A
Data Modulation Protocol	Bell 103A & 212A, CCITT V.22bis & V.22
Fax Modulation Protocol	N/A
Error Correction/Compression	Unidentified

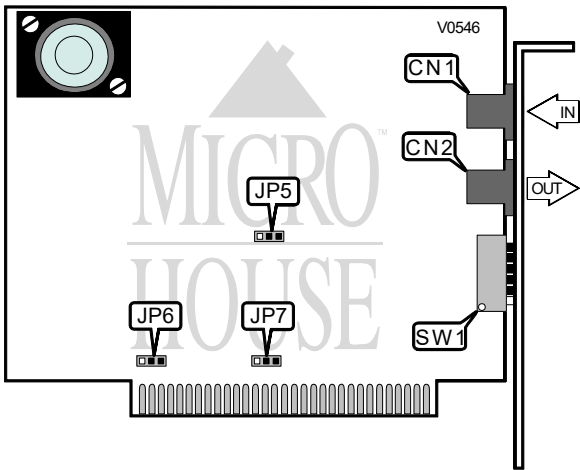

CONNECTIONS			
Purpose	Location	Purpose	Location
Line in	CN1	Line out	CN2

COM PORT CONFIGURATIONS		
COM #	SW1/1	SW1/2
COM1	On	On
COM2	On	Off
COM3	Off	On
COM4	Off	Off

DATA TERMINAL READY - DTR	
Setting	SW1/3
Disabled	Off
Enabled	On

Continued on next page . . .

OMNITEL, INC.  
T 2 4 0 0 - P C 1 / P C 2

... continued from previous page

CARRIER DETECT - CD	
Setting	SW1/4
Disabled	Off
Enabled	On

FACTORY CONFIGURED SETTINGS	
Switch	Setting
SW1/5	Off
SW1/6	Off

CLEAR TO SEND OPTIONS	
Setting	JP5
CTS follows RTS	Pins 2 & 3
CTS follows CD	Pins 1 & 2

INTERUPT SELECT		
Setting	Jf 3	Jf 7
IRQ2	N/A	Pins 2 & 3 closed
IRQ3	N/A	Pins 1 & 2 closed
IRQ4	Pins 1 & 2 closed	N/A
IRQ5	Pins 2 & 3 closed	N/A