


COMPUADD, INC.
16-BIT HI-REZ VGA

Category	Video
Video Types Supported	XVGA
Video Processor	TM-4000
Highest Resolution Supported	1024 x 768
Data Bus Type	16-Bit ISA
Memory Type	VRAM
Maximum Onboard Memory	1024KB

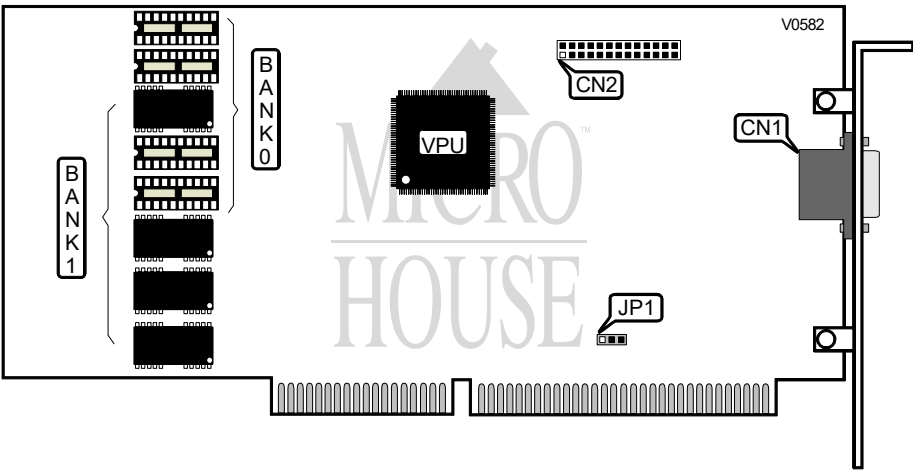

CONNECTIONS			
Purpose	Location	Purpose	Location
15-pin analog video port	CN1	VGA Feature Connector	CN2

DISPLAY CONFIGURATION	
Setting	JP1
Normal Operation	Pins 1 & 2 Closed
3270 VTAM Emulation bug fix	Pins 2 & 3 Closed
Note: On one version the JP1 jumper is horizontally placed and on another it is positioned vertically.	

MEMORY CONFIGURATION		
Size	Bank 0	Bank 1
512KB	NONE	(4) 256K x 4
1024KB	(4) 256K x 4	(4) 256K x 4