


COMPUTER PERIPHERALS, INC. HOOK-UP 2400S VER. 1

| | |
|---------------------------------|--------------|
| Modem Type | Data |
| Maximum Data Rate | 2400 bps |
| Maximum Fax Rate | N/A |
| Data Bus | 8-bit ISA |
| Fax Class | N/A |
| Data Modulation Protocol | Unidentified |
| Fax Modulation Protocol | N/A |
| Error | Unidentified |
| Correction/Compression | |

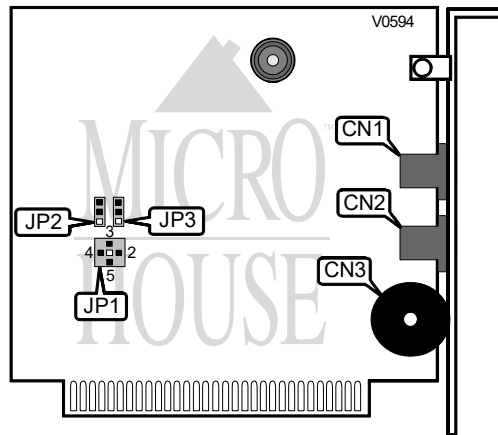

| CONNECTIONS | | | |
|-------------|----------|----------------|----------|
| Purpose | Location | Purpose | Location |
| Line in | CN1 | Speaker Volume | CN3 |
| Line out | CN2 | | |

| INTERRUPT SETTINGS | |
|--------------------|-------------------|
| Setting | JP1 |
| IRQ4 | Pins 1 & 4 closed |
| IRQ2 | Pins 1 & 2 closed |
| IRQ3 | Pins 1 & 3 closed |
| IRQ5 | Pins 1 & 5 closed |

| COM PORT AND ADDRESS SETTINGS | | |
|-------------------------------|-------------------|-------------------|
| Setting | JP2 | JP3 |
| COM1 & 3F8 - 3FFh | Pins 1 & 2 closed | Pins 1 & 2 closed |
| COM2 & 2F8 - 2FFh | Pins 1 & 2 closed | Pins 2 & 3 closed |
| COM3 & 3E8 - 3EFh | Pins 2 & 3 closed | Pins 1 & 2 closed |
| COM4 & 2E8 - 2EFh | Pins 2 & 3 closed | Pins 2 & 3 closed |