


DIAMOND MULTIMEDIA SYSTEMS, INC.

VIPER SE VLB/VIPER PRO VIDEO

Category	Video
Video Types Supported	XVGA
Video Processor	Weitek P9100
Highest Resolution Supported	1600 x 1280
Data Bus Type	32-bit VESA Local Bus
Memory Type	VRAM
Maximum Onboard Memory	2MB

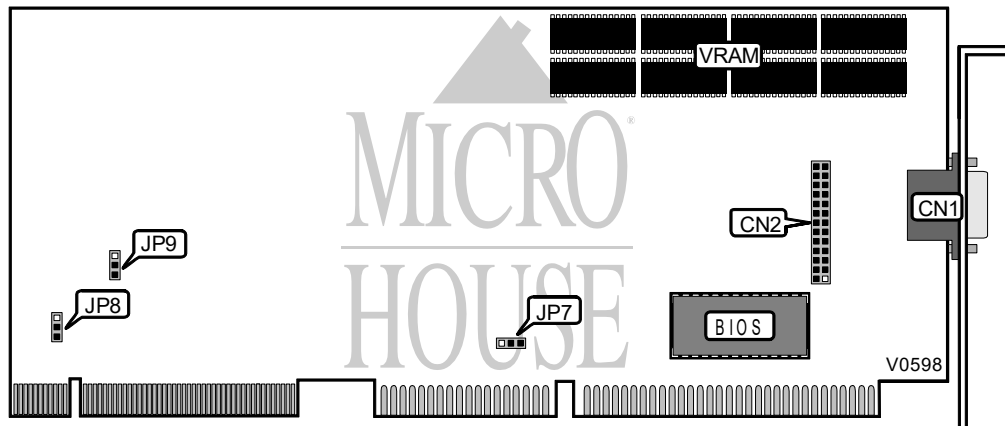

CONNECTIONS			
Position	Location	Position	Location
15-pin analog video port	CN1	VGA feature connector	CN2

VIDEO POWER INTERRUPT SELECTION	
IRQ	JP7
9	Pins 2 & 3 closed
15	Pins 1 & 2 closed

EGA INTERRUPT CONFIGURATION	
IRQ2	JP8
Disabled	Pins 1 & 2 closed
Enabled	Pins 2 & 3 closed

VL-BUS SPEED SELECTION	
Speed	JP9
33KHz	Pins 2 & 3 closed
50KHz	Pins 1 & 2 closed

MISCELLANEOUS TECHNICAL NOTE
Note: The Viper SE VLB/Viper Pro Video comes in two versions, a 2MB upgradable to 4MB & a standard 2MB version. The diagram above is the standard 2MB version.