


# AST RESEARCH, INC. G-7 ADVANTAGE! PLUS FAX/MODEM

<b>Modem Type</b>	Data (Asynchronous/Synchronous)/Fax
<b>Maximum Data Rate</b>	2400 bps
<b>Maximum Fax Rate</b>	Unidentified
<b>Data Bus</b>	8-bit ISA
<b>Fax Class</b>	Class 1
<b>Data Modulation Protocol</b>	Unidentified
<b>Fax Modulation Protocol</b>	Unidentified
<b>Error</b>	Unidentified
<b>Correction/Compression</b>	

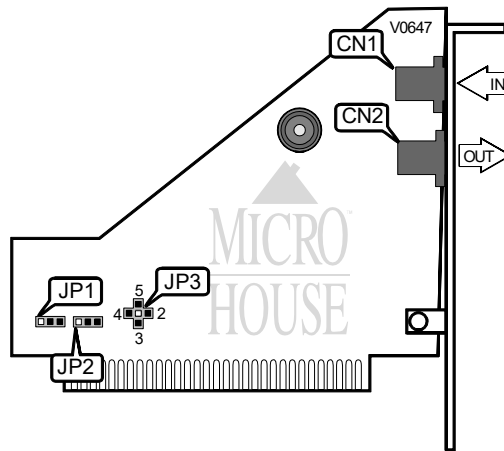

CONNECTIONS			
Purpose	Location	Purpose	Location
Line in	CN1	Line out	CN2

COM PORT/ADDRESS SETTINGS		
COM	JP1	JP2
COM1/3F8h	Pins 2 & 3 closed	Pins 2 & 3 closed
COM2/2F8h	Pins 1 & 2 closed	Pins 2 & 3 closed
COM3/3E8h	Pins 2 & 3 closed	Pins 1 & 2 closed
COM4/2E8h	Pins 1 & 2 closed	Pins 1 & 2 closed
Note: JP2 on the G6 model is horizontally positioned.		

INTERRUPT SETTINGS	
IRQ	JP3
IRQ3	Pins 1 & 4 closed
IRQ4	Pins 1 & 3 closed
IRQ5	Pins 1 & 2 closed
IRQ7	Pins 1 & 5 closed