


# 80 DATA MINI 2S1P CARD

Card Type  
Chipset/Controller  
I/O Options  
Maximum DRAM

Multi-I/O  
Unidentified  
Parallel port, Serial ports (2)  
N/A

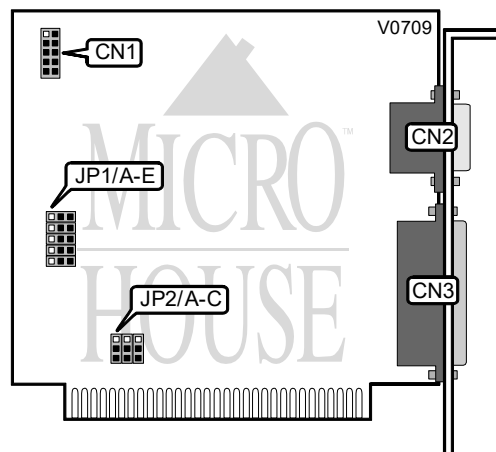

CONNECTIONS			
Purpose	Location	Purpose	Location
Serial port 1 - internal	CN1	Parallel port	CN3
Serial port 2 - external	CN2		

SERIAL PORT 1 CONFIGURATION - JP1				
COM/Address	umper A	umper B	umper C	umper D
COM1/3F8h	Pins 1 & 2 closed	Pins 1 & 2 open	Pins 1 & 2 open	Pins 1 & 2 open
COM2/2F8h	Pins 1 & 2 open	Pins 1 & 2 closed	Pins 1 & 2 open	Pins 1 & 2 open
COM3/3E8h	Pins 1 & 2 open	Pins 1 & 2 open	Pins 1 & 2 closed	Pins 1 & 2 open
COM4/2E8h	Pins 1 & 2 open	Pins 1 & 2 open	Pins 1 & 2 open	Pins 1 & 2 closed
Disabled	Pins 1 & 2 open	Pins 1 & 2 open	Pins 1 & 2 open	Pins 1 & 2 open

SERIAL PORT 2 CONFIGURATION - JP1				
COM/Address	umper A	umper B	umper C	umper D
COM2/2F8h	Pins 2 & 3 open	Pins 2 & 3 closed	Pins 2 & 3 open	Pins 2 & 3 open
COM1/3F8h	Pins 2 & 3 closed	Pins 2 & 3 open	Pins 2 & 3 open	Pins 2 & 3 open
COM3/3E8h	Pins 2 & 3 open	Pins 2 & 3 open	Pins 2 & 3 closed	Pins 2 & 3 open
COM4/2E8h	Pins 2 & 3 open	Pins 2 & 3 open	Pins 2 & 3 open	Pins 2 & 3 closed
Disabled	Pins 2 & 3 open	Pins 2 & 3 open	Pins 2 & 3 open	Pins 2 & 3 open

Continued on next page...

# 80 DATA MINI 2S1P CARD

...continued from previous page

SERIAL PORTS 1 & 2 INTERRUPT SELECT - JP2			
Port 1	Port 2	Jumper A	Jumper B
IRQ4	IRQ3	Pins 2 & 3 closed	Pins 1 & 2 closed
IRQ3	IRQ4	Pins 1 & 2 closed	Pins 2 & 3 closed
IRQ3	Disabled	Pins 1 & 2 closed	All pins open
IRQ4	Disabled	Pins 2 & 3 closed	All pins open
Disabled	IRQ3	All pins open	Pins 1 & 2 closed
Disabled	IRQ4	All pins open	Pins 2 & 3 closed
Disabled	Disabled	All pins open	All pins open

PARALLEL PORT CONFIGURATION	
LPT/Address	JP1/Jumper E
LPT2/378h	Pins 2 & 3 closed
LPT3/278h	Pins 1 & 2 closed
Disabled	All pins open

PARALLEL PORT INTERRUPT SELECT	
IRQ	JP2/Jumper C
IRQ7	Pins 1 & 2 closed
IRQ5	Pins 2 & 3 closed
Disabled	All pins open