


OMNITEL, INC.
T 1 2 0 0 - P C 2

Modem Type	Data (Asynchronous)
Maximum Data Rate	1200 bps
Maximum Fax Rate	N/A
Data Bus	8-bit ISA
Fax Class	N/A
Data Modulation Protocol	Bell 212A, CCITT V.22bis & V.22
Fax Modulation Protocol	N/A
Error Correction/Compression	Unidentified

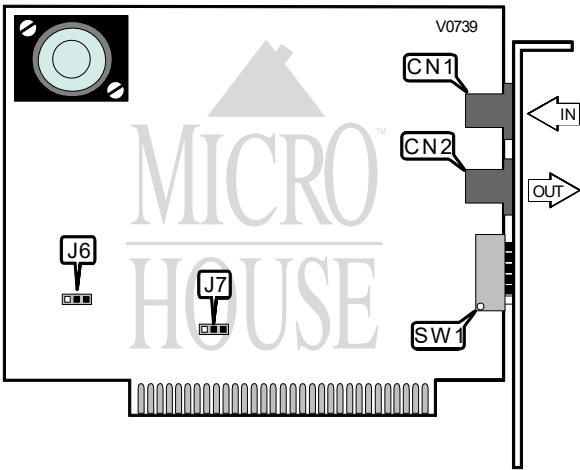

CONNECTIONS			
Purpose	Location	Purpose	Location
Line in	CN1	Line out	CN2

COM PORT CONFIGURATIONS		
COM #	SW1/1	SW1/2
COM1	On	On
COM2	On	Off
COM3	Off	On
COM4	Off	Off

AUTO ANSWER SELECT	
Setting	SW1/3
Enabled	On
Disabled	Off

CARRIER DETECT - CD	
Setting	SW1/6
True Carrier	Off
Forced on	On

Continued on next page . . .

OMNITEL, INC.
T 1 2 0 0 - P C 2

... continued from previous page

FACTORY CONFIGURED SETTINGS	
Switch	Setting
SW1/4	Off

INTERUPT SELECT		
Setting	J	J
IRQ2	N/A	Pins 2 & 3 closed
IRQ3	N/A	Pins 1 & 2 closed
IRQ4	Pins 1 & 2 closed	N/A
IRQ5	Pins 2 & 3 closed	N/A

DTR SELECT	
Setting	SW1/5
í Forced on	On
System controlled	Off