


PROLINK COMPUTER, INC.
 MVGA-S3C928

Category	Video
Video Types Supported	XVGA
Video Processor	S3, Inc.
Highest Resolution Supported	1280 x 1024
Data Bus Type	VESA local bus
Memory Type	DRAM
Maximum Onboard Memory	2MB

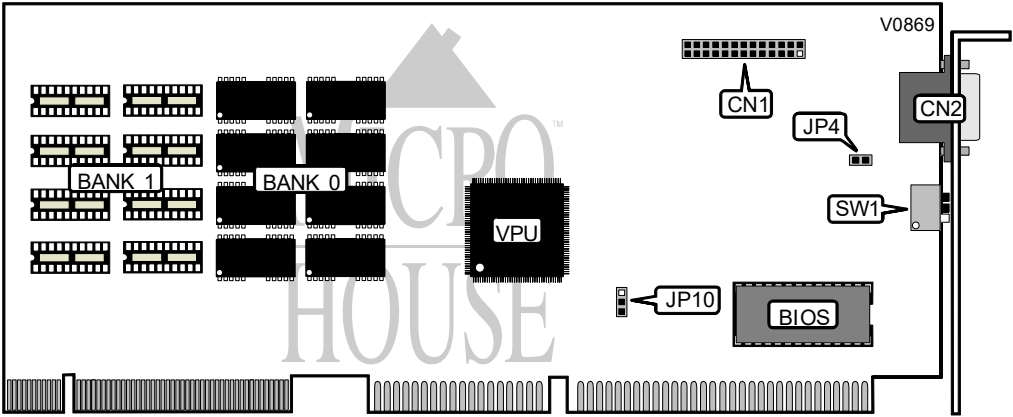

CONNECTIONS			
Purpose :	Location	Purpose :	Location
VESA feature connector	CN1	15-pin analog video port	CN2

INTERRUPT SELECT	
IRQ	JP10
Disabled	All pins open
IRQ3	Pins 1 & 2 closed
IRQ9	Pins 2 & 3 closed

MONITOR SELECT			
Resolution/Vertical Frequency/Horizontal Frequency	SW1/1	SW1/2	SW1/3
640 x 480 non-interlaced/60Hz/31.5KHz	On	Off	On
640 x 480 non-interlaced/72Hz/38KHz	Off	Off	On
800 x 600 non-interlaced/60Hz/38KHz	On	Off	On
800 x 600 non-interlaced/72Hz/48.5KHz	Off	Off	On
800 x 600 non-interlaced/56Hz/35.5KHz	Off	On	Off
1024 x 768 interlaced/43.5Hz/35.5KHz	On	On	Off
1024 x 768 non-interlaced/60Hz/48.5KHz	On	Off	Off
1024 x 768 non-interlaced/70Hz/57KHz	Off	Off	Off
1280 x 1024 interlaced/43Hz/46KHz	On	On	Off
1280 x 1024 non-interlaced/64Hz/65KHz	Off	Off	Off

Continued on next page. . .

PROLINK COMPUTER, INC.
MVGA-S3C928

...continued from previous page

DRAM CONFIGURATION			
Size	P4	B nk 0	B nk 1
1MB	Open	(8) 256K x 4	None
2MB	Closed	(8) 256K x 4	(8) 256K x 4