


PROLINK COMPUTER, INC. MVGA-S3C928PCI

Category	Video
Video Types Supported	XVGA
Video Processor	S3, Inc.
Highest Resolution Supported	1280 x 1024
Data Bus Type	PCI
Memory Type	DRAM
Maximum Onboard Memory	2MB

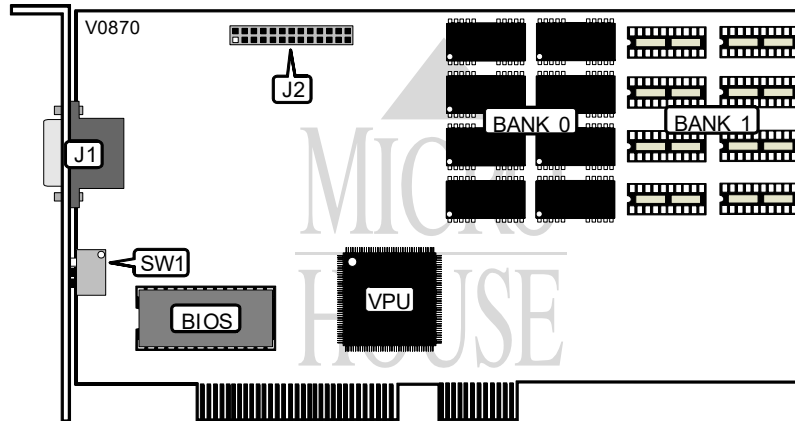

CONNECTIONS			
Purpose :	Location	Purpose :	Location
15-pin analog video port	J1	VESA feature connector	J2

MONITOR SELECT				
Resolution/Vertical Frequency/Horizontal Frequency	SW1/1	SW1/2	SW1/3	
640 x 480 non-interlaced/60Hz/31.5KHz	On	Off	On	
640 x 480 non-interlaced/72Hz/38KHz	Off	Off	On	
800 x 600 non-interlaced/60Hz/38KHz	On	Off	On	
800 x 600 non-interlaced/72Hz/48.5KHz	Off	Off	On	
800 x 600 non-interlaced/56Hz/35.5KHz	Off	On	Off	
1024 x 768 interlaced/43.5Hz/35.5KHz	On	On	Off	
1024 x 768 non-interlaced/60Hz/48.5KHz	On	Off	Off	
1024 x 768 non-interlaced/70Hz/57KHz	Off	Off	Off	
1280 x 1024 interlaced/43Hz/46KHz	On	On	Off	
1280 x 1024 non-interlaced/64Hz/65KHz	Off	Off	Off	

DRAM CONFIGURATION		
Size	Bank 1	Bank 2
1MB	(8) 256K x 4	None
2MB	(8) 256K x 4	(8) 256K x 4