


PROLINK COMPUTER, INC.
MVGA-TW32PVL

Category	Video
Video Types Supported	XVGA
Video Processor	Tseng Laboratories, Inc.
Highest Resolution Supported	1280 x 1024
Data Bus Type	VESA local bus
Memory Type	DRAM
Maximum Onboard Memory	2MB

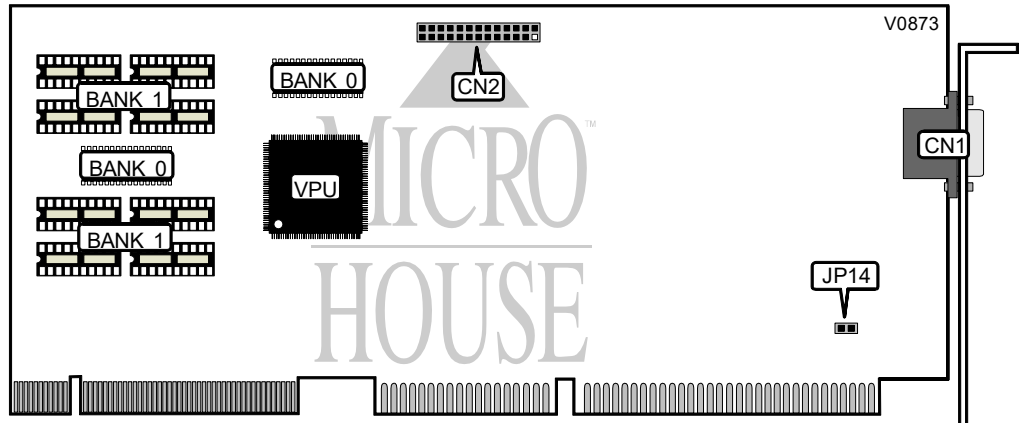

CONNECTIONS			
Purpose	Location	Purpose	Location
15-pin analog video port	CN1	VESA feature connector	CN2

IRQ9	
Setting	JP14
Disabled	Open
Enabled	Closed

DRAM CONFIGURATION		
Size	Bank 1	Bank 0
1MB	(2) 512K x 8	None
2MB	(2) 512K x 8	(8) 256K x 4