


PROLINK COMPUTER, INC.
MVGA-ALPINEPCI

Category	Video
Video Types Supported	XVGA
Video Processor	Cirrus Logic, Inc.
Highest Resolution Supported	1280 x 1024
Data Bus Type	PCI
Memory Type	DRAM
Maximum Onboard Memory	4MB

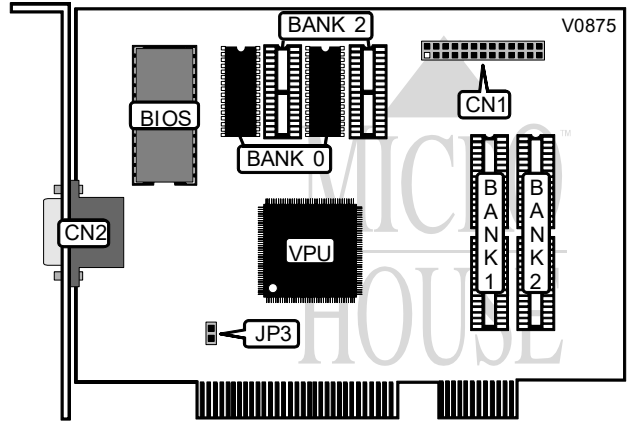

CONNECTIONS			
Purpose	Location	Purpose	Location
VESA feature connector	CN1	15-pin analog video port	CN2

IRQ9	
Setting	JP3
Disabled	Open
Enabled	Closed

DRAM CONFIGURATION			
Size	B nk 0	B nk 1	B nk 2
1MB	(2) 512K x 8	None	None
2MB	(2) 512K x 8	(2) 512K x 8	None
4MB	(2) 512K x 8	(2) 512K x 8	(4) 512K x 8